
Welcome
Introduction to API Design and Development

Slides: https://bit.ly/apipdf9
Setup: https://bit.ly/sebapisetup

DevelopIntelligence
A PLURALSIGHT COMPANY

Hello

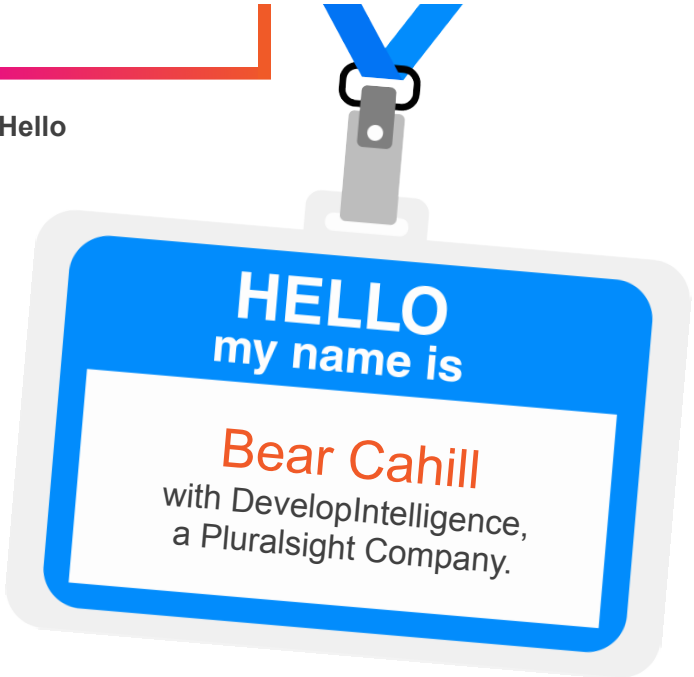

About me...

- IBM, Ericsson, Travelocity
- Author, Online Courses
- iOS, AWS -> API
- I ❤️ RESTful JSON
- Jag älskar Sverige!

Prerequisites

This course assumes you:

- This course assumes you are familiar with the concepts of server-client relationship and the core needs of data delivery to/from servers/clients.
- This course will cover the common concepts of API Design and development focusing on RESTful JSON API design.

Why RESTful JSON?

- Widely used, supported API structure
- Flexible but defined
- Focused on data (not functionality)
- Can be a facade
- Human Readable
- Cross-platform, language, etc.

We teach over 400 technology topics



You experience our impact on a daily basis!



My pledge to you

I will...

- Make this as interesting and interactive as possible
- Ask questions in order to stimulate discussion
- Use whatever resources I have at hand to explain the material
- Try my best to manage verbal responses so that everyone who wants to speak can do so
- Use an on-screen timer for breaks so you know when to be back

Objectives

At the end of this course you will be able to:

- Understand the design and structure of a RESTful API
- Be able to define a RESTful JSON spec (OpenAPI)
- Become familiar with tools related to API design/development
- Understand various concepts and approaches to API design
- Understand concepts related to API testing
- Determine a course of action for developing an API

Agenda

- Introduction
- JSON
- Key Aspects of REST
- API Design
- OpenAPI API Specification
- Design Concepts
- Richardson Maturity Model
- Testing and Development
- Development Standards
- Contracts
- Design First vs Code First
- Automated Testing
- Versioning
- Security
- API Design Details
- Automated Testing Details

How we're going to work together

- Discussion
- Demo
- Do!

DevelopIntelligence

A PLURALSIGHT COMPANY

Introduction to API Design and Development


Bear Cahill ~ bear@brainwashinc.com

Copyright Brainwash Inc. 2022-2023

Understanding APIs in Software Delivery: Introduction

Copyright Brainwash Inc. 2022-2023


- **Install Insomnia**
  - **https://insomnia.rest/download**

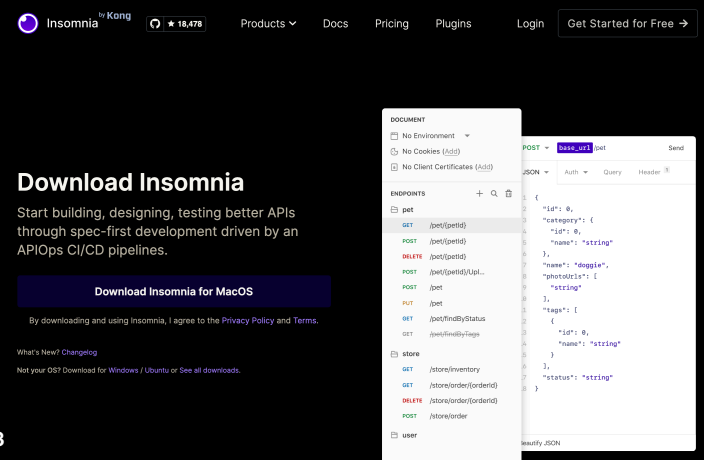


Copyright Brainwash Inc. 2022-2023

Understanding APIs in Software Delivery: Introduction

- **Insomnia**
  - **Preferences > General**
    - **Uncheck 'Validate Certificates'**
  - **HTTP Network Proxy**
    - **http://wss.sebank.se:80**



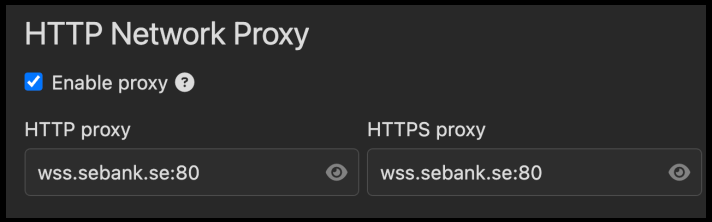

Copyright Brainwash Inc. 2022-2023

- **Optional: Install Nodejs/npm**
  - **https://nodejs.org/en/download/**



If on SEB VPN or at an SEB location, execute:
npm config set registry https://repo.sebank.se/artifactory/api/npm/seb-npm/

Copyright Brainwash Inc. 2022-2023



- **Insomnia CLI**
- **Download: https://github.com/Kong/insomnia/releases/tag/lib@3.14.0**
- **Docker image: https://hub.docker.com/r/kong/inso**

- **Docker alternative needs the SEB docker mirror. It implies an installed version "docker desktop" (requires an admin account elevation).**
- **Docker desktop installation: https://github.sebank.se/pages/seb-common/Developer-garden/detail_pages/docker-desktop.html**

Copyright Brainwash Inc. 2022-2023



- **Granted that the learner has Docker Desktop installed, the image should be pulled as follows**


```
s4325c@CZ7NCK3:~$ docker login docker.repo7.sebank.se -u s4325c
Password:

Login Succeeded
s4325c@CZ7NCK3:~$ docker pull docker.repo7.sebank.se/kong/inso
Using default tag: latest
latest: Pulling from kong/inso
df9b9388f04a: Pull complete
98cff93acaed: Pull complete
0acc45f3dfda: Pull complete
Digest: sha256:e9543a77f0753d92afff9a3272e8b6edcad704639659aaaebd3552a8d8e9edb2
Status: Downloaded newer image for docker.repo7.sebank.se/kong/inso:latest
docker.repo7.sebank.se/kong/inso:latest
```

- **Potential errors:**
- **Error saving credentials: error storing credentials - err: docker-credential-desktop.exe resolves to executable in current directory (./ docker-credential-desktop.exe), out: ``**
- **Resolution: Delete the line with credsStore from ~/.docker/config.json.**

Copyright Brainwash Inc. 2022-2023

- **Create Github Account**
  - **https://github.com/signup**

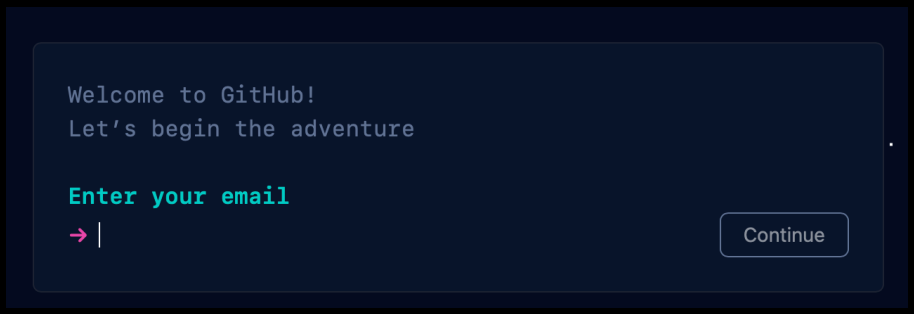

Copyright Brainwash Inc. 2022-2023


Understanding APIs in Software Delivery: Introduction

- **JSON Server npm install -g json-server**
- **See: https://github.com/typicode/json-server**




Copyright Brainwash Inc. 2022-2023

API Design: Introduction

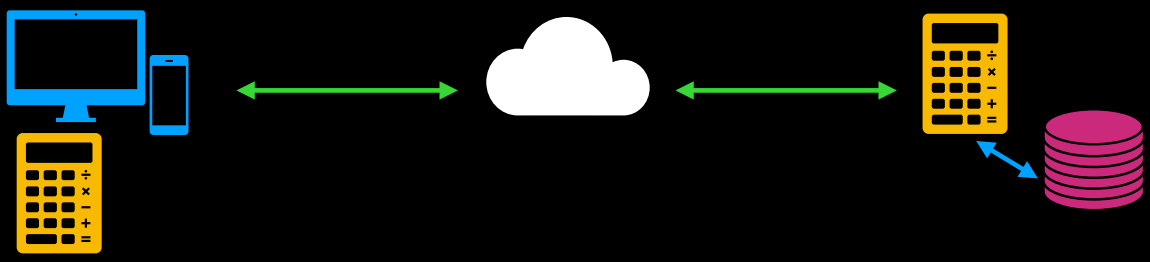

Copyright Brainwash Inc. 2022-2023


API Design: Introduction

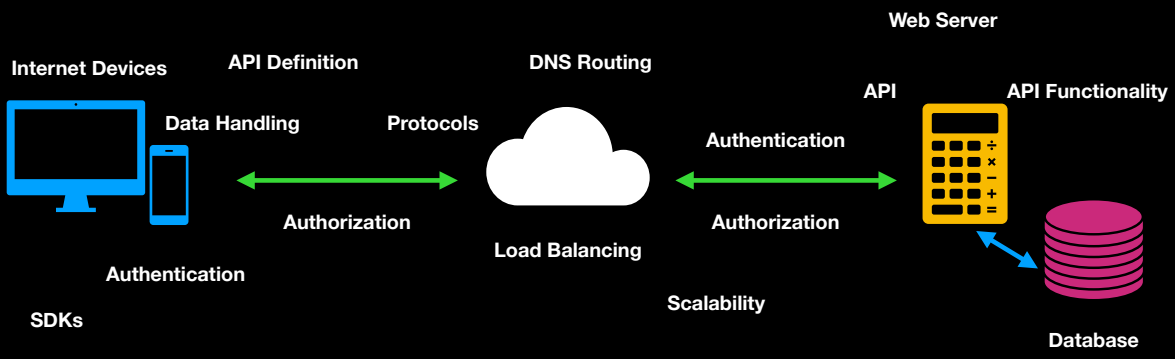

Copyright Brainwash Inc. 2022-2023

API Design: Introduction


- API Backend
  - Servers (e.g., Apache, Tomcat)
    - Web Server Apps
    - Processes API Requests
    - Functionality
      - Java, C#, Python, PHP, etc.
  - Data
    - Database (e.g., Oracle, MySQL)



Copyright Brainwash Inc. 2022-2023


API Design: Introduction

- API Routing & Security
  - DNS
  - Load Balancing
    - Scalability
  - Authentication
    - OAuth, Token/JWT
  - Authorization
    - Permissions

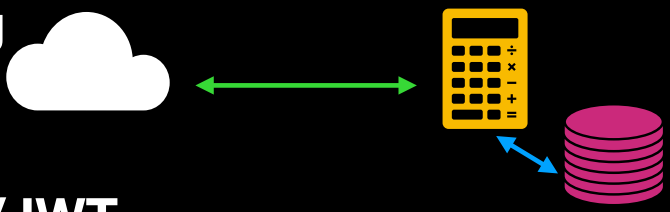

Copyright Brainwash Inc. 2022-2023


API Design: Introduction



- API Client
  - Device on Internet
  - Understands API
    - Endpoints (Nouns, Verbs)
    - Data formats (JSON)
  - Login/Authentication
    - e.g., Token Header

Copyright Brainwash Inc. 2022-2023


API Design: Introduction

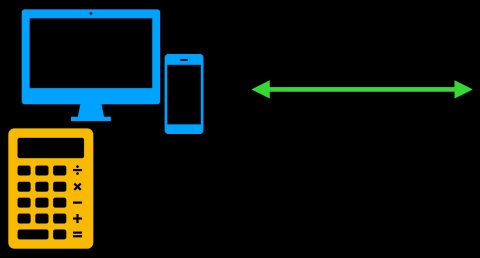

- Client Communication
  - HTTP/s
  - JSON, XML, etc.
  - API Endpoints
  - Provided SDKs
    - Generated code

Copyright Brainwash Inc. 2022-2023


API Design: Introduction

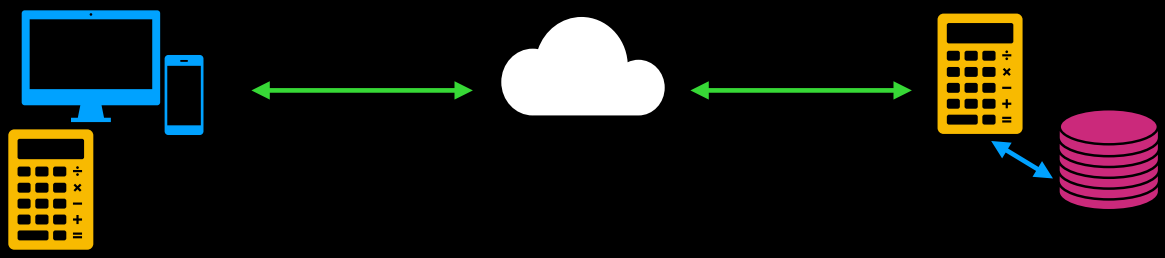

Copyright Brainwash Inc. 2022-2023

API Design: Introduction

API

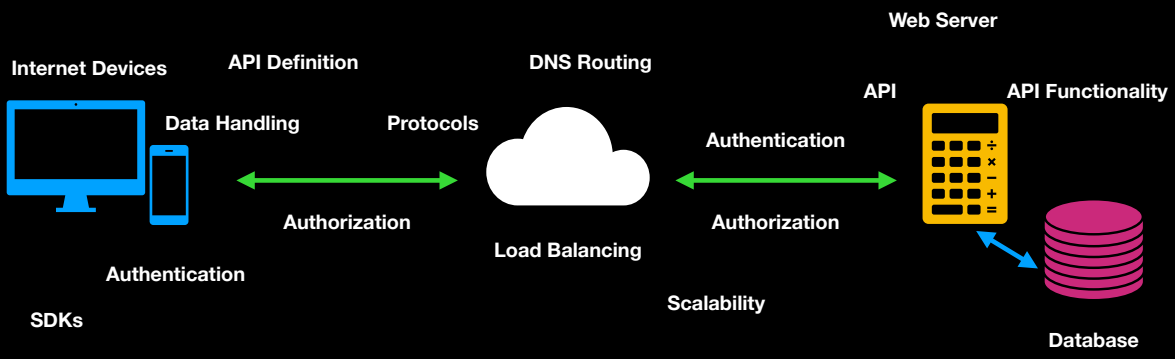


OpenAPI Spec

Copyright Brainwash Inc. 2022-2023


API Design: Introduction

- **AWS**

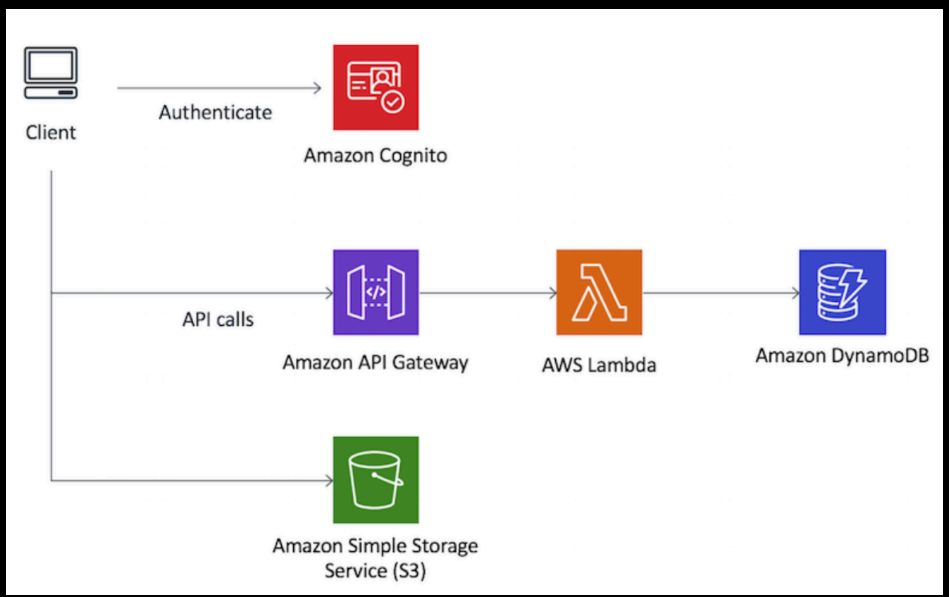

Copyright Brainwash Inc. 2022-2023


API Design: Introduction




- Past:
  - API Wild West
    - URL/Query String, Form Data, etc.
  - SOAP/WSDL
  - XML, text, etc.
- Everything was proprietary, complex
- Needed a Standard

Copyright Brainwash Inc. 2022-2023

API Design: Introduction




- 2000:
  - Roy Fielding's doctoral dissertation on REST (REpresentational State Transfer)
- 2001:
  - JSON by Douglas Crockford
    - JavaScript Object Notation
    - json.org

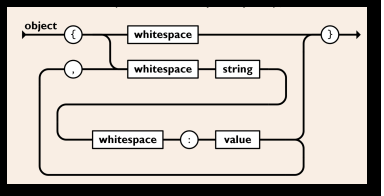

Copyright Brainwash Inc. 2022-2023

API Design: Introduction



- Early 2000s - Money to be made
  - Access data
  - Useful functionality, storage
- eBay, Flickr, Amazon, Twitter, etc.
  - The standard is key

Copyright Brainwash Inc. 2022-2023

API Design: Introduction



- REST (or other) API is expected now
- Libraries/frameworks/SDKs abound
- Variations cause problems
- Downside: better solutions will suffer from inertia

Copyright Brainwash Inc. 2022-2023

API Design: Introduction



- gRPC - grpc.io
  - g = ?
  - Remote Procedure Call
  - "a client application can directly call a method on a server application on a different machine as if it were a local object"
- GraphQL
  - flexible
  - data efficient
  - Facebook 2012, open-source 2015

gRPC is a modern open source high performance Remote Procedure Call (RPC) framework that can run in any environment. It can efficiently connect services in and across data centers with pluggable support for load balancing, tracing, health checking and authentication. It is also applicable in last mile of distributed computing to connect devices, mobile applications and browsers to backend services.



- Image from: https://engineering.fb.com/2015/09/14/core-data/graphql-a-data-query-language/

Copyright Brainwash Inc. 2022-2023

API Design: Introduction



- Enter: OpenAPI
  - Standard
  - Versioned (e.g., 3.0.1)
  - https://swagger.io/specification/
- API OpenAPI Definition
  - Provides details of implementation
  - Contract/Standard
  - Versioned (e.g., 1.1.3)
  - Starts with Info section

Copyright Brainwash Inc. 2022-2023

API Design: Documenting

- Open API
- More doc/spec:
- https://github.com/OAI/OpenAPI-Specification/tree/main/versions
- Various vers



OpenAPI Object

This is the root document object of tl

Fixed Fields

Field Name	Type
openapi	`string`
info	Info Object
servers	[Server Object]
paths	Paths Object
components	Components Object
security	[Security Requirement Object]
tags	[Tag Object]
externalDocs	External Documentation Object

Components Object

Holds a set of reusable objects for different aspects of the OAS. All objects defir API unless they are explicitly referenced from properties outside the component

Fixed Fields

Field Name	Type
schemas	Map[`string` , Schema Object | Reference Object]
responses	Map[`string` , Response Object | Reference Object]
parameters	Map[`string` , Parameter Object | Reference Object]
examples	Map[`string` , Example Object | Reference Object]
requestBodies	Map[`string` , Request Body Object | Reference Object]
headers	Map[`string` , Header Object | Reference Object]

Copyright Brainwash Inc. 2022-2023

API Design: Introduction

- Editor: Info
- editor.swagger.io
- Start with version
  - openapi: 3.0.1
- Notice Errors
- Insert > Info



Swagger Editor
Supported by SMARTBEAR

```
1  openapi: 3.0.1
```

Errors


Structural error at
should have required property 'info'
missingProperty: info
Jump to line 0


Structural error at
should have required property 'paths'
missingProperty: paths
Jump to line 0

Copyright Brainwash Inc. 2022-2023

API Design: Introduction

- Editor
- Insert > Info
  - Enter text in fields
  - License/Contact optional
  - Click 'Add Info'



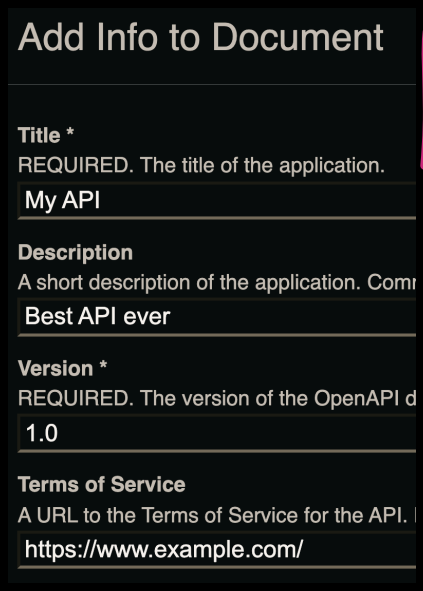

Copyright Brainwash Inc. 2022-2023

API Design: Introduction

- Text inserted

```yaml
openapi: 3.0.1
info:
  title: My API
  version: '1.0'
  description: Best API ever
  termsOfService: https://www.example.com/
  contact:
    email: bear@brainwashinc.com
    name: Bear Cahill
    url: http://www.example.com/contact
  license:
    name: My License
    url: http://www.example.com/license
```


- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: JSON



- Consider the data represented
- Fetch users
- Fetch 1 user
- Attempts too.
- User's attempts
- What is returned?

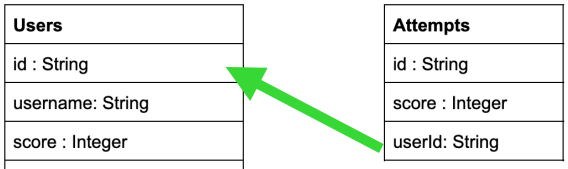

Copyright Brainwash Inc. 2022-2023

API Design: JSON



- RESTful JSON
- JSON
  - JavaScript Object Notation
  - json.org
  - Arrays, Dictionaries of values
  - Represented in text
  - Parseable across platforms, languages, etc.

```
value
    object
    array
    string
    number
    "true"
    "false"
    "null"

object
    '{' ws '}'
    '{' members '}'

members
    member
    member ',' members

member
    ws string ws ':' element

array
    '[' ws ']'
    '[' elements ']'
```

Copyright Brainwash Inc. 2022-2023

API Design: JSON



- **Data represented in JSON**
- **…/users/1234abc**

```
{
  "id": "1234abc",
  "username": "bear",
  "score": 55,
  "active": true
}
```

Users
id : String
username: String
score : Integer
active : Boolean

Copyright Brainwash Inc. 2022-2023

API Design: JSON



- **JSON**
  - **Object name (User) not included**
  - **Arrays [ ]**
  - **Dictionary/Object { }**
  - **Keys are Strings**
  - **Values vary**
    - **Strings, Ints, Bool, Dictionaries, Array**

```
value
    object
    array
    string
    number
    "true"
    "false"
    "null"

object
    '{' ws '}'
    '{' members '}'

members
    member
    member ',' members

member
    ws string ws ':' element

array
    '[' ws ']'
    '[' elements ']'
```

Copyright Brainwash Inc. 2022-2023


API Design: JSON



- JSON
  - RESTful JSON - very common combo
  - SDKs often provide parsing
  - Sometimes built into languages
    - JS, Swift (Codeable)

Copyright Brainwash Inc. 2022-2023

API Design: JSON




- Lab
  - https://jsonlint.com/
  - Create an array of Elements
  - Each element has 4 members:
    - id of type String
    - username of type String
    - score of type Integer
    - active of type Boolean
  - See next slide for hints

Users
id : String
username: String
score : Integer
active : Boolean

Copyright Brainwash Inc. 2022-2023


API Design: JSON



- Lab
  - json.org has details
  - Arrays are within [and]
  - Elements are within { and }
  - Element members are key-value pairs
    - "id" : "test"
  - Members and Array elements are comma separated
  - See next slide for example

Copyright Brainwash Inc. 2022-2023

API Design: JSON



- Lab

```
[{
    "id": "1234abc",
    "username": "bear",
    "score": 55,
    "active": true
}, {
    "id": "xyz123",
    "username": "schmeb",
    "score": 550,
    "active": false
}, {
    "id": "qwerty",
    "username": "jed",
    "score": 553,
    "active": true
}]
```

- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: Design



- Key Concepts
- HTTP/s for communication

- State is…
  - Value(s) of data at a given time

- REST API Statelessness
  - Nothing stored by server (or possibly even sent by client) about state

Copyright Brainwash Inc. 2022-2023

API Design: Design



- Key Aspects
  - Nouns - resource based
    - e.g., User, …/users
  - Verbs to URIs
    - e.g., GET, POST
  - Stateless - each request has it all
    - Scaleable - doesn't need same server for next request

Copyright Brainwash Inc. 2022-2023

API Design: Design




- Key Aspects
  - Nouns - resource based
    - e.g., Users
      - <domain>/users
      - http://www.example.com/api/users
      - Array of User objects (JSON): [ ]
      - <domain>/users/<id>
      - http://www.example.com/api/users/234
        - 1 User object: { }

Copyright Brainwash Inc. 2022-2023

API Design: Design

- Key Aspects
  - Nouns - resource based
    - Relationships in URL
    - Attempts relates to Users
    - /users/qwerty/attempts - returns 2 comments

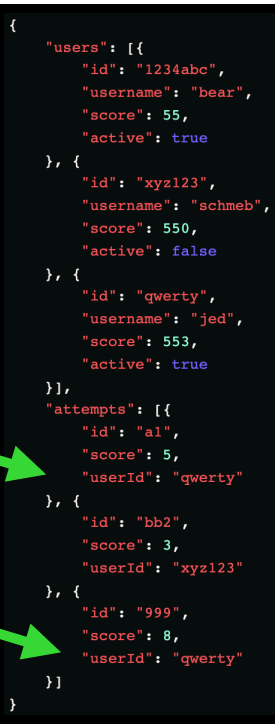

```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```

Copyright Brainwash Inc. 2022-2023

API Design: Design

- Verbs - CRUD
  - POST = Create
    - …/users
  - GET = Read
  - PATCH = Update
    - …/users/1234abc
    - {“score”:56}
  - DELETE = Delete

Copyright Brainwash Inc. 2022-2023


```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```



API Design: Design

- Verbs - CRUD
  - GET - read
    - …/users - all
    - …/users/1 - user with id = 1
    - …/attempts - all
    - …/attempts/1 - one
    - …/users/1/attempts


Copyright Brainwash Inc. 2022-2023



```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```

- **Lab: GET**
- **https://my-json-server.typicode.com/typicode/demo**
- **View db.json file**
- **Via browser:**
  - **GET posts, single post, comments, single comment, comments for 1 post**





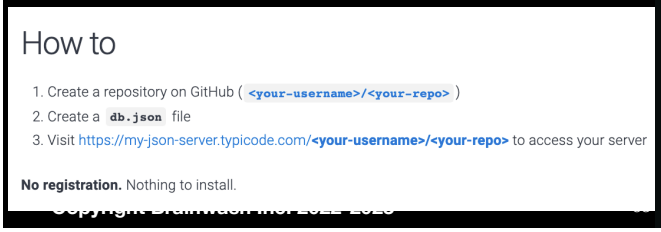

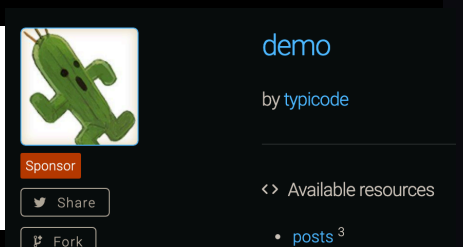


- **Lab: GET - Different db.json**
- **https://my-json-server.typicode.com/bearc0025/api**
- **View db.json file**
- **Via browser:**
  - **GET users, 1 user, attempts, 1 attempt, get all attempts of a user, etc.**






Copyright Brainwash Inc. 2022-2023

- **Lab: OpenAPI Server**
- **editor.swagger.io > Insert > Add Servers**
- **Fill out form**
- **Click Add Servers (bottom right)**



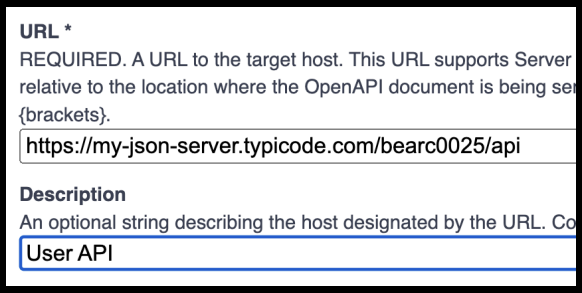

Copyright Brainwash Inc. 2022-2023

- **Lab: OpenAPI Server**
- **Results**

```yaml
servers:
  - url: https://my-json-server.typicode.com/bearc0025/api
    variables: {}
    description: User API
```





- **End of lab**


Copyright Brainwash Inc. 2022-2023

API Design: Design

- **Lab: OpenAPI Add Path**
- **Insert > Add Path Item**
- **Fill in form**
- **Click Add Path**








Creates:

```yaml
paths:
  /users:
    summary: user level operations
    description: create and read users
```

Copyright Brainwash Inc. 2022-2023


API Design: Design


- **Lab: OpenAPI Add Path Method: GET**
- **Insert > Add Operation**
- **Fill in form**
- **Click Add Operation**



Creates:

```yaml
paths:
  /users:
    summary: user level operations
    description: create and read users
    get:
      summary: fetch users
      description: read users from server
      operationId: fetchUsers
      responses:
        default:
          description: Default error sample response
      tags:
        - users
```




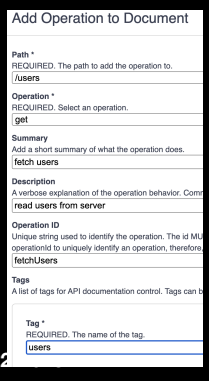


Copyright Brainwash Inc. 2022

API Design: Design

- Lab: OpenAPI Add Path Method: GET
- Notice updated documentation
- Execute GET

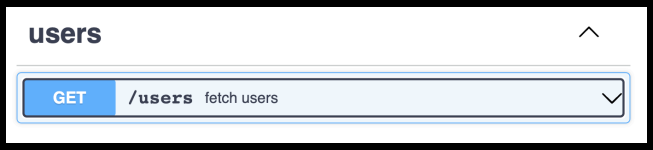

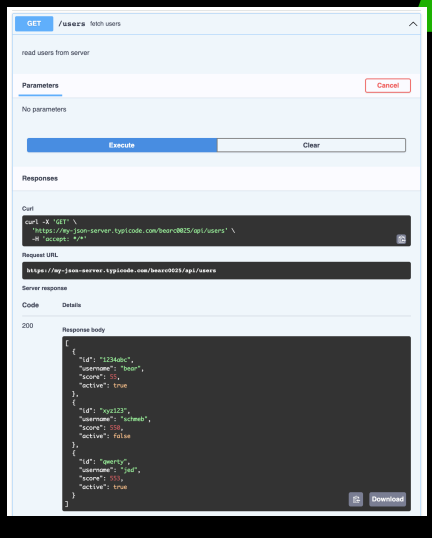

- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: Design

- Verbs - Create, Update
  - POST = Create
  - PATCH = Update …/users/<id>
  - PUT …/users
    - If exists, replace
    - Otherwise, create
    - Idempotent - multiple requests, same result


```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```


Copyright Brainwash Inc. 2022-2023

API Design: Design

- Verbs - CRUD
  - POST = Create
  - GET = Read
  - PATCH = Update
  - DELETE = Delete
- POST/PUT/PATCH
  - Overlap
  - Require HTTP body

Copyright Brainwash Inc. 2022-2023


```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```


API Design: Design

- Query String
  - Additional parameters:
    - Filtering
    - Searching
    - Paging
    - Embedding
    - etc.
- …/api/users/1?_embed=attempts

Copyright Brainwash Inc. 2022-2023


```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```

API Design: Design




- **For more… PluralSight**

APIs- Application Programming Interface: Executive Briefing

Dan Appleman

Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts

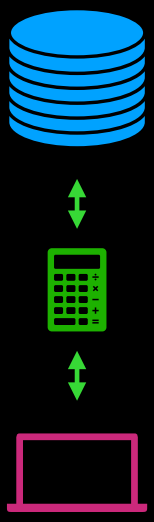

Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts


- Separation of Concerns
  - Gathering Data - e.g., from database
  - Formatting Data - e.g., JSON
  - Delivering Data - e.g., HTTP, streaming
  - Security
  - Scaleability
  - Reliability
  - Etc.



Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts


- Separation of Concerns
  - Gathering Data
    - When requested by client
    - Very important on the server
    - Good database design
    - Cache if possible
    - Efficient queries



Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts


- Separation of Concerns
  - Formatting Data
    - When sending/returning to client
    - Important to client
    - Directed by server (one-for-all)



Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts

- Separation of Concerns
  - Delivering Data
    - How it is sent: protocol, etc.
    - Important to client
    - Directed by server
      - Usually the same for all clients



Copyright Brainwash Inc. 2022-2023

API Design: Design




- Operations: Responses
  - Default Response
  - Specified by Status Code (e.g., 200, 404, etc.)
  - Includes:
    - Description
    - Content
      - Content Type
        - Schema

```yaml
get:
  summary: fetch users
  description: read users from server
  operationId: fetchUsers
  responses:
    default:
      description: Default error sample response
  tags:
    - users
```

Copyright Brainwash Inc. 2022-2023

API Design: Design



- For all 200-299 respones
- application/json content
- Schema is an object
- With properties


Users
id : String
username: String
score : Integer
active : Boolean

```yaml
get:
  summary: fetch users
  description: read users from server
  operationId: fetchUsers
  responses:
    '2XX':
      description: successful fetch
      content:
        application/json:
          schema:
            type: object
            properties:
              id:
                type: string
                example: "abc123"
              username:
                type: string
                example: "bear"
              score:
                type: integer
                example: 55
              active:
                type: boolean
                example: true
```


Copyright Brainwash Inc. 2022-2023

API Design: Design

- Lab: OpenAPI Add GET Response
- NOTE: We'll make this an array later.



```yaml
get:
  summary: fetch users
  description: read users from server
  operationId: fetchUsers
  responses:
    '2XX':
      description: successful fetch
      content:
        application/json:
          schema:
            type: object
            properties:
              id:
                type: string
                example: "abc123"
              username:
                type: string
                example: "bear"
              score:
                type: integer
                example: 55
              active:
                type: boolean
                example: true
```

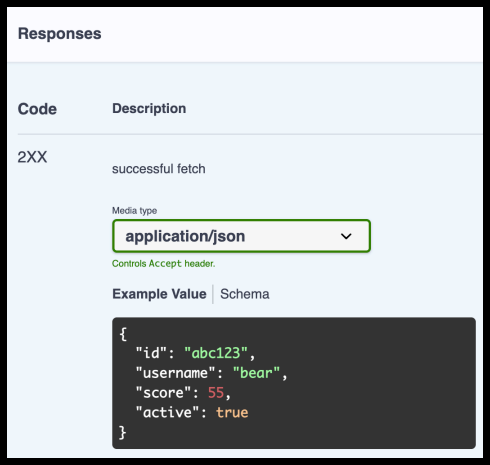

- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: Design Concepts



- Errors
  - HTTP
  - Response Codes
    - 1xx: Informational
    - 2xx: Success
    - 3xx: Redirection
    - 4xx: Client Error
    - 5xx: Server Error
  - https://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html

Copyright Brainwash Inc. 2022-2023


API Design: Design Concepts




- **Errors - Best Practices**
  - **"Helpful" information is best**
    - **Readable message**
    - **Meaningful codes (http and internal)**
    - **Hints/Details when possible and appropriate**

Copyright Brainwash Inc. 2022-2023

API Design: Design



- **Lab**
- If you have a git account. Create a **public** repo…
- **https://my-json-server.typicode.com/**
- **Demo data @ https://my-json-server.typicode.com/bearc0025/api/db**

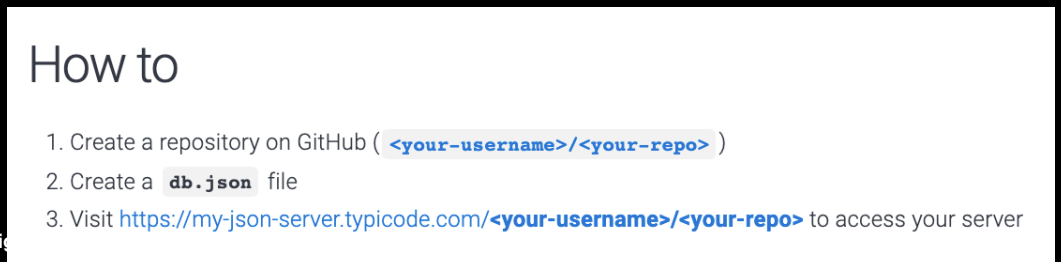



Copyri

API Design: Design Concepts



- **Now that we have two…**
- **Add Another Server**
- **editor.swagger.io**
- **Insert > Add Servers**



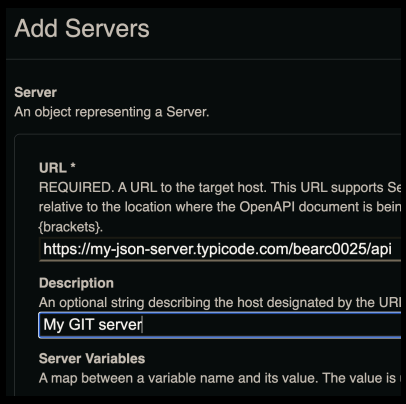

- **Add your server or mine:**
  - **https://my-json-server.typicode.com/bearc0025/api**

Copyright Brainwash Inc. 2022-2023

API Design: Richardson Maturity Model



Copyright Brainwash Inc. 2022-2023

API Design: Richardson Maturity Model

- Breakdown https://martinfowler.com/articles/richardsonMaturityModel.html
- Four Levels:
  - Level 0: Uses HTTP
  - Level 1: Resources (nouns)
  - Level 2: HTTP Verbs
  - Level 3: Hypermedia Controls (HATEOAS = Hypertext As The Engine Of Application State)



Copyright Brainwash Inc. 2022-2023

API Design: Richardson Maturity Model

- Level 0: Uses HTTP
  - Mostly just HTTP plus anything…
    - XML, YAML, JSON, etc.
    - RPC
  - Might be one endpoint for all requests
    - Content specifies details for request and response
    - And/or GET query string



Copyright Brainwash Inc. 2022-2023

API Design: Richardson Maturity Model

- Level 1: Resources (nouns)
  - Various endpoints
    - e.g., /users, /users/1
  - Body/GET still specifies details
    - Request, Response
  - Various formats: XML, etc.



Copyright Brainwash Inc. 2022-2023

API Design: Richardson Maturity Model

- Level 2: HTTP Verbs
  - GET
    - Same request, same results
    - Cacheable
  - POST (create)
    - 201 Created
    - 409 Conflict
  - PUT, PATCH, DELETE, etc.



Copyright Brainwash Inc. 2022-2023

Level 3: Hypermedia Controls (HATEOAS = Hypertext As The Engine Of Application State)

- What to do next and how
- Can be dynamic
- Client doesn't need knowledge

- …/departments/10



```
{
  "departmentId": 10,
  "departmentName": "Administration",
  "locationId": 1700,
  "managerId": 200,
  "links": [
    {
      "href": "10/employees",
      "rel": "employees",
      "type" : "GET"
    }
  ]
}
```

Copyright Brainwash Inc. 2022-2023

- HATEOAS
  - No official OpenAPI format
  - Common practice includes:
    - href: URI
    - rel: relation type
    - type: expected media resource type (e.g., JSON or https://restfulapi.net/hateoas/)
  - See RFC5988 and Hypertext Application Language (HAL)

```
{
  "departmentId": 10,
  "departmentName": "Administration",
  "locationId": 1700,
  "managerId": 200,
  "links": [
    {
      "href": "10/employees",
      "rel": "employees",
      "type" : "GET"
    }
  ]
}
```



Copyright Brainwash Inc. 2022-2023

API Design: Components



- Many sections for reuse
- Note: schemas
  - Can define schemas
  - Reference in Operations
- Also, responses
  - Reference schemas
  - Reference in Operations


Fixed Fields

Field Name	Type	Descrip
schemas	Map[string, Schema Object | Reference Object]	An object to hold reusable Schema Objects.
responses	Map[string, Response Object | Reference Object]	An object to hold reusable Response Objects.
parameters	Map[string, Parameter Object | Reference Object]	An object to hold reusable Parameter Objects.
examples	Map[string, Example Object | Reference Object]	An object to hold reusable Example Objects.
requestBodies	Map[string, Request Body Object | Reference Object]	An object to hold reusable Request Body Objects.
headers	Map[string, Header Object | Reference Object]	An object to hold reusable Header Objects.
securitySchemes	Map[string, Security Scheme Object | Reference Object]	An object to hold reusable Security Scheme Objects.
links	Map[string, Link Object | Reference Object]	An object to hold reusable Link Objects.
callbacks	Map[string, Callback Object | Reference Object]	An object to hold reusable Callback Objects.

- https://swagger.io/specification/

Copyright Brainwash Inc. 2022-2023

API Design: Components



- Create a components section (bottom)
- Add a schemas section
- Add a schema in it named ‘FullUser’
- Copy under “schema” in the ‘2XX’ response
  - Fix indenting
- Replace ‘2XX’ schema with ref

```yaml
responses:
  '2XX':
    description: successful fetch
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/FullUser'
```


```yaml
components:
  schemas:
    FullUser:
      type: object
      properties:
        id:
          type: string
          example: "abc123"
        username:
          type: string
          example: "bear"
        score:
          type: integer
          example: 55
        active:
          type: boolean
          example: true
```

- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: Design

- Lab
- https://pokeapi.co/
- Fetch data and drill down into more
- Try with limit and offset

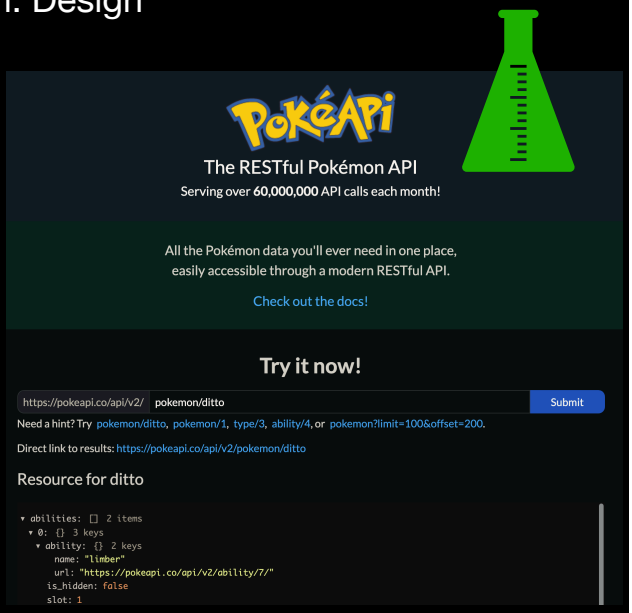


Copyright Brainwash Inc. 2022-2023

API Design: Design

- Lab
- https://swapi.dev/
- Fetch data and drill down into more
- Try with page query string parameter

https://swapi.dev/api/ people?page=5

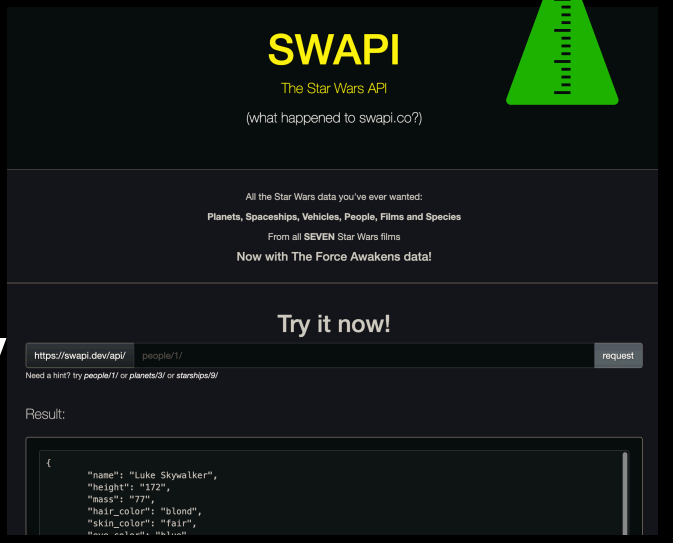

Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards



Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards



- **Contract communicates details**
- **Maintaining the contract helps keep all parties consistent/correct**
- **Changes should be driven via the contract**
  - **Centralized update for all**

Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards



- API Spec
  - Swagger/OpenAPI
  - Endpoints (paths)
  - Methods (verbs)
  - Requests bodies
  - Response bodies
  - Model
  - Parameters

Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards



- Benefits
  - Source of Truth
  - Contract with agreement
  - Communication
  - Reliable, dependable, predictable
- Otherwise - opposite of above

- Remember: An API is meant to be used - don’t make it difficult

Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards

- Richardson Maturity Model
  - Use HTTP, resources, verbs and (possibly) Hypermedia
- Security - OAuth, SSL
- Documentation
  - Readily available
  - Updated
- Versioning - in URL, header, both



Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards

- Filtering/Sorting/Searching/Limiting/ Pagination
  - Query string parameters
  - Route alias for complex/common
    - /reports/{date}
  - Embed/expand
- Caching
  - Custom, ETag (hash version of resource) or Last-Modified
  - 304 Not Modified response



Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards

- POST/PUT/PATCH - return resource
- JSON
  - Including PUT/POST/PATCH http body
  - Not key-value: name=bear&ver=1.1
  - Content-type: application/json
- Camel case vs Snake case
  - Camel for JavaScript and similar
  - camelCase vs snake_case



Copyright Brainwash Inc. 2022-2023

API Design: Dev Standards

- HEAD
  - Identical to GET but no body for response
  - Meta info in headers per resource
    - Last mod, length, content type
  - Can be used for URL validity tests
  - Cacheable
    - 'Expires' or
    - Cache-Control header



```
HTTP/1.1 200 OK
Accept-Ranges: bytes
Content-Type: text/html; charset=UTF-8
Date: Wed, 08 May 2013 10:12:29 GMT
ETag: "780602-4f6-4db31b2978ec0"
Last-Modified: Thu, 25 Apr 2013 16:13:23
Content-Length: 1270
```

Copyright Brainwash Inc. 2022-2023

- **OPTIONS**
  - API options (Allow/Content-type)
  - Doesn't initiate data fetch/storage
  - May apply to server or specific resource
  - Non-Cacheable
    - It's not a true resource (GET)
    - https://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html



```
HTTP/1.1 200 OK
Allow: GET,HEAD,POST,OPTIONS,TRACE
Content-Type: text/html; charset=UTF-8
Date: Wed, 08 May 2013 10:24:43 GMT
Content-Length: 0
```

9.2 OPTIONS

The OPTIONS method represents a request for information about the communication options available on the request/response chain identified by the Request-URI. This method allows the client to determine the options and/or requirements associated with a resource, or the capabilities of a server, without implying a resource action or initiating a resource retrieval.

Responses to this method are not cacheable.

- **TRACE**
  - Should reflect the message received back to client as the body
  - Allows client to see what/how is being received on the other end



  - See https://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html

Copyright Brainwash Inc. 2022-2023

API Design: Contracts


- OpenAPI Documentation
- https://swagger.io/specification/
- Various sections and types

Field Name	Type	Description
openapi	`string`	**REQUIRED**. This string MUST be the semantic version number of the OpenAPI Specification version that the OpenAPI document uses. The `openapi` field SHOULD be used by tooling specifications and clients to interpret the OpenAPI document. This is *not* related to the API `info.version` string.
info	Info Object	**REQUIRED**. Provides metadata about the API. The metadata MAY be used by tooling as required.
servers	[Server Object]	An array of Server Objects, which provide connectivity information to a target server. If the `servers` property is not provided, or is an empty array, the default value would be a Server Object with a url value of `/`.
paths	Paths Object	**REQUIRED**. The available paths and operations for the API.
components	Components Object	An element to hold various schemas for the specification.
security	[Security Requirement Object]	A declaration of which security mechanisms can be used across the API. The list of values includes alternative security requirement objects that can be used. Only one of the security requirement objects need to be satisfied to authorize a request. Individual operations can override this definition. To make security optional, an empty security requirement (`{}`) can be included in the array.
tags	[Tag Object]	A list of tags used by the specification with additional metadata. The order of the tags can be used to reflect on their order by the parsing tools. Not all tags that are used by the Operation Object must be declared. The tags that are not declared MAY be organized randomly or based on the tools' logic. Each tag name in the list MUST be unique.
externalDocs	External Documentation Object	Additional external documentation.

Copyright Brainwash Inc. 2022-2023

API Design: Contracts


- Tools
  - SwaggerUI/Hub
  - Insomnia
  - OpenAPI Generator
  - Postman
  - PAW
  - Stoplight
  - Swashbuckle
- Can help generate or consume

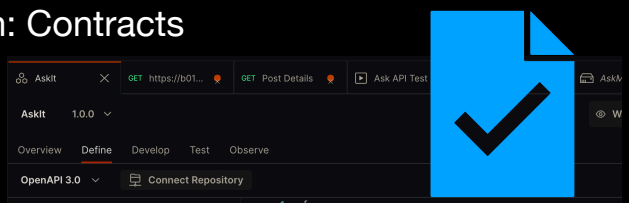



Copyright Brainwash Inc. 2022-2023

API Design: Insomnia

- Create API in Insomnia
  - Open Insomnia
  - Click Create > Design Document
    - Give it a name and click Create

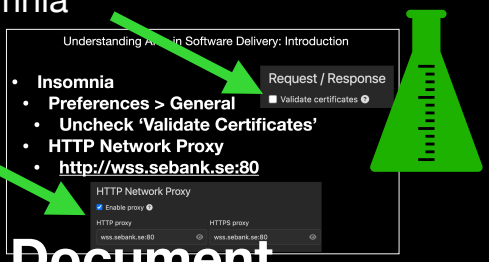

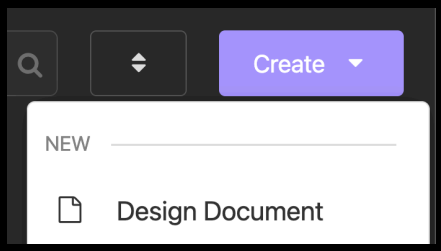


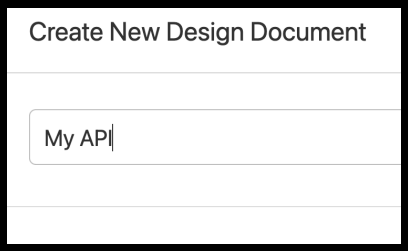


Copyright Brainwash Inc. 2022-2023

API Design: Insomnia

- Paste your texts from the Swagger editor into the Insomnia editor

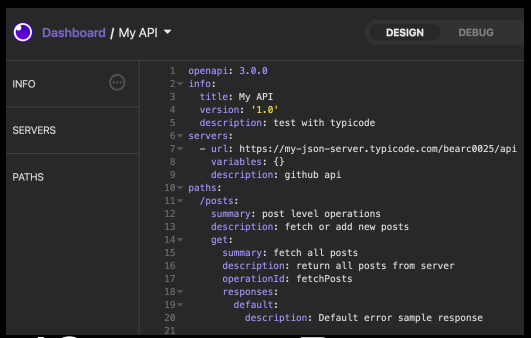


- Click on 'Generate Request Collection'




Copyright Brainwash Inc. 2022-2023

API Design: Insomnia



- **Test in the Debug tab**

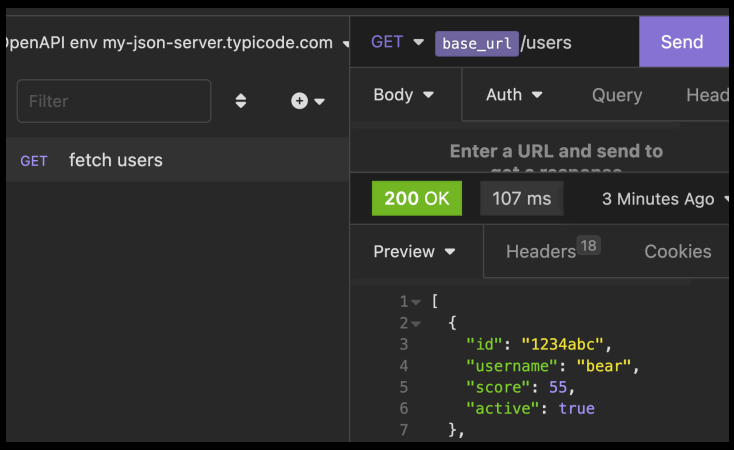

- **End of lab**

Copyright Brainwash Inc. 2022-2023


API Design: Contracts

- **For more… PluralSight**

Designing RESTful Web APIs


Shawn Wildermuth

Copyright Brainwash Inc. 2022-2023



- **Lab: Local Typicode JSON Server**
  - **Local server**
  - **Same data as Typicode db.json file**
  - **Add server in OpenAPI design**

Copyright Brainwash Inc. 2022-2023



- **Lab: github.com/typicode/json-server**
- **npm install -g json-server**

- **https://nodejs.org/en/download/**

SEB if on VPN:
npm config set registry https://repo.sebank.se/artifactory/api/npm/seb-npm/

npm config set registry https://repo.sebank.se/artifactory/api/npm/seb-npm/

Certificate fail:
npm config set strict-ssl false
https://github.sebank.se/pages/seb-common/Developer-garden/detail_pages/developer-onboarding.html

If you need proxy:
npm config set proxy http://wss.sebank.se:80
npm config set https-proxy http://wss.sebank.se:80
npm config set noproxy ".sebank.se localhost"

Getting started

Install JSON Server

```
npm install -g json-server
```

Create a `db.json` file with some data

```
{
```

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics


- **Create db.json file with contents like previous test server**
- **https://my-json-server.typicode.com/bearc0025/api/db**


```
{
    "users": [{
        "id": "1234abc",
        "username": "bear",
        "score": 55,
        "active": true
    }, {
        "id": "xyz123",
        "username": "schmeb",
        "score": 550,
        "active": false
    }, {
        "id": "qwerty",
        "username": "jed",
        "score": 553,
        "active": true
    }],
    "attempts": [{
        "id": "a1",
        "score": 5,
        "userId": "qwerty"
    }, {
        "id": "bb2",
        "score": 3,
        "userId": "xyz123"
    }, {
        "id": "999",
        "score": 8,
        "userId": "qwerty"
    }]
}
```


Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics

- **Lab**
- **json-server --watch db.json**
  - **Or: npx json-server -w db.json**
  - **In same folder as db.json file**
- **http://localhost:3000/users**



```
Bear-MBP:json-server bearc2022$ json-server --watch db.json

  \{^_^}/ hi!

  Loading db.json
  Done

  Resources
  http://localhost:3000/users
  http://localhost:3000/attempts


  Home
  http://localhost:3000
```

localhost:3000/users/1234abc



```
{
  "id": "1234abc",
  "username": "bear",
  "score": 55,
  "active": true
}
```


Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics




- **Lab**
- **http://localhost:3000/users/qwerty/attempts**

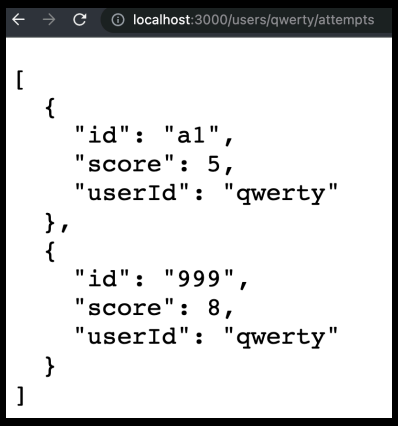


Copyright Brainwash Inc. 2022-2023


API Design: RESTful API Basics



- **Lab**
- **Add Server to Swagger editor**
- **Via menu or edit text**




```
servers:
  - url: http://localhost:3000
    variables: {}
    description: Local User API
  - url: https://my-json-server.typicode.com/bearc0025/api
    variables: {}
    description: User API
```

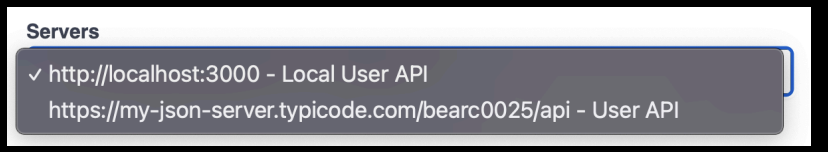


Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics




- Lab
- Test against local server

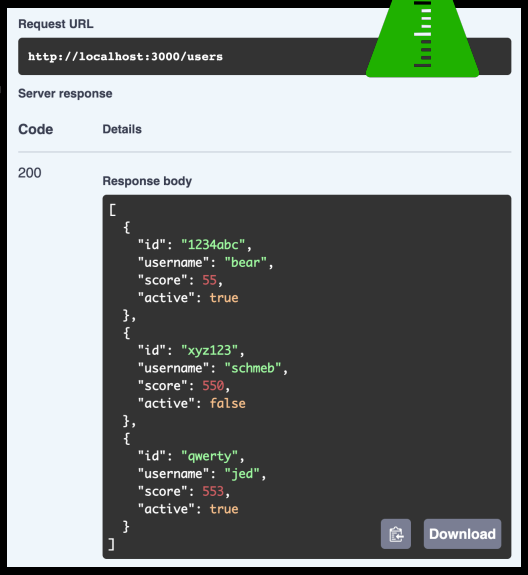

- End of lab

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics




- CRUD: Create
- POST HTTP Method
- Usually on base path e.g. /users
- HTTP Body with data: JSON
  - Server creates ID
  - Request Body without ID

```
{
  "username": "bear",
  "score": 55,
  "active": true
}
```

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics

- https://swagger.io/specification/#parameter-object
- Similar to Response/schema
- Not per-HTTP code
- Can be defined in Components



Request Body Object

Describes a single request body.


Fixed Fields


Field Name	Type
description	`string`
content	Map[`string`, Media Type Object]
required	`boolean`

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics


- Lab: Add /users POST
- Add POST operation
  - /users
  - post



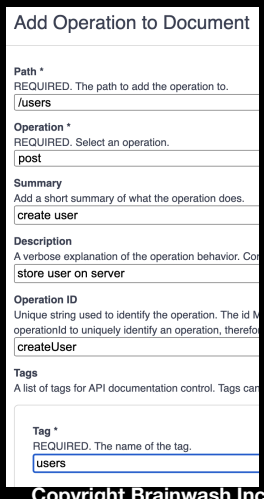


```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  responses:
    default:
      description: Default error sample response
  tags:
    - users
```


Copyright Brainwash Inc. 2022-2023



- Lab
- Without a Request Body section, the documentation doesn't specify what to send
- Add Request Body (typed out on next slide)

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  responses:
    default:
      description: Default error sample response
  tags:
    - users
```

Copyright Brainwash Inc. 2022-2023




- Lab
- requestBody:
  - Starts section
- required: true
- content:
  - application/json
  - schema
    - object

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    required: true
    content:
      application/json:
        schema:
          type: object
          properties:
            username:
              type: string
              example: bear
            score:
              type: integer
              example: 55
            active:
              type: boolean
              example: true
```

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics

- Lab
- properties:
  - Object data
- <name> e.g., title
- type:
  - String, Integer, etc.
  - See https://swagger.io/specification/#data-types
- Can be required (otherwise, optional)

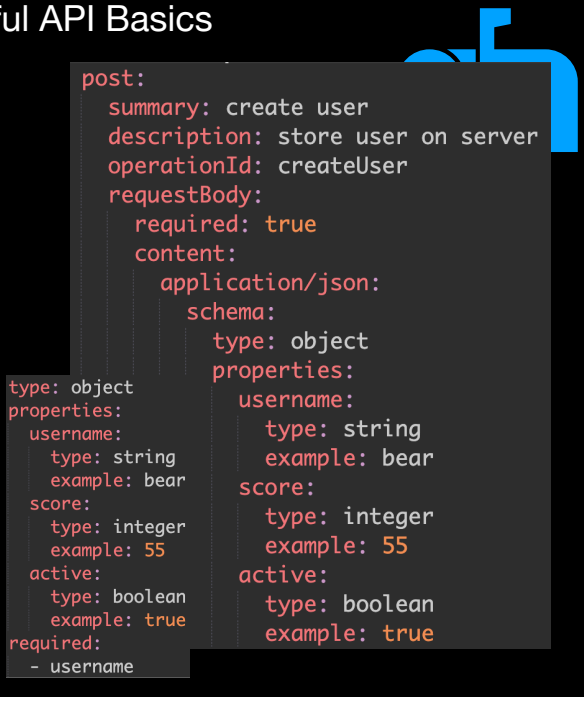


```
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    required: true
    content:
      application/json:
        schema:
          type: object
          properties:
            username:
              type: string
              example: bear
            score:
              type: integer
              example: 55
            active:
              type: boolean
              example: true
```


```
type: object
properties:
  username:
    type: string
    example: bear
  score:
    type: integer
    example: 55
  active:
    type: boolean
    example: true
required:
  - username
```

Copyright Brainwash Inc. 2022-2023

API Design: RESTful API Basics

- Lab
- Test in documentation
- Verify response



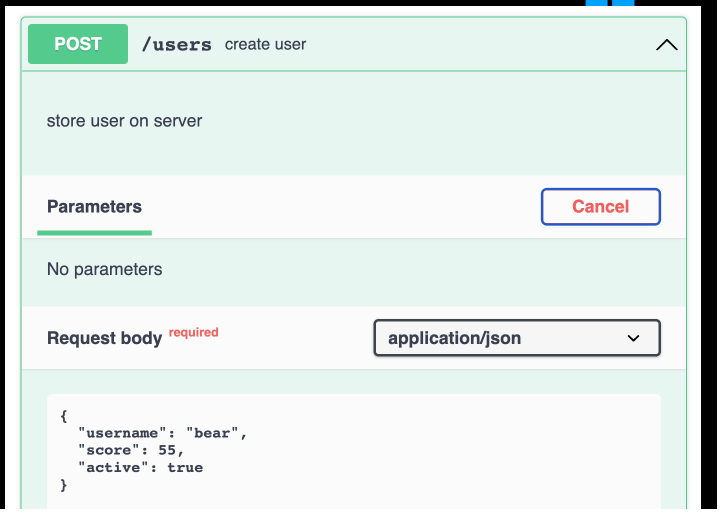

- End of lab

Copyright Brainwash Inc. 2022-2023



- Lab: Add Request to POST
- Add PostNewUser to schemas:

```yaml
PostNewUser:
  type: object
  properties:
    username:
      type: string
      example: bear
    score:
      type: integer
      example: 55
    active:
      type: boolean
      example: true
```

- Add ref in post method requestBody:

```yaml
requestBody:
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/PostNewUser'
```

- End of lab.

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Schemas
  - Also supports:
    - Wildcards contents: image/*
    - anyOf, oneOf, allOf
    - Files
    - Multipart POSTs
    - Form Data

```yaml
requestBody:
  description: A JSON object containing pet informa
  content:
    application/json:
      schema:
        oneOf:
          - $ref: '#/components/schemas/Cat'
          - $ref: '#/components/schemas/Dog'
          - $ref: '#/components/schemas/Hamster'
```


```yaml
examples:
  hamster:  # <--- example name
    summary: An example of a hamster
    value:
      # vv Actual payload goes here vv
      name: Ginger
      petType: hamster
```

```yaml
Dog:     # "Dog" is a value for the pet_type propert
  allOf: # Combines the main `Pet` schema with `Dog`
    - $ref: '#/components/schemas/Pet'
    - type: object
      # all other properties specific to a `Dog`
      properties:
        bark:
          type: boolean
        breed:
          type: string
          enum: [Dingo, Husky, Retriever, Shepherd]
```

Copyright Brain

API Design

- OpenAPI: Schemas
  - FullUser is the same as PostNewUser plus id
  - Define FullUser as PostNewUser and id

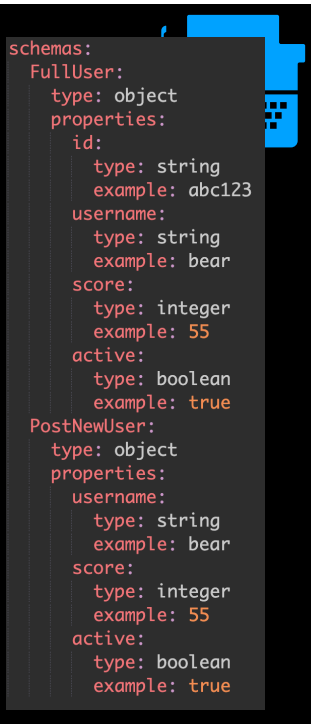

```yaml
schemas:
  FullUser:
    type: object
    properties:
      id:
        type: string
        example: abc123
      username:
        type: string
        example: bear
      score:
        type: integer
        example: 55
      active:
        type: boolean
        example: true
  PostNewUser:
    type: object
    properties:
      username:
        type: string
        example: bear
      score:
        type: integer
        example: 55
      active:
        type: boolean
        example: true
```

Copyright Brainwash Inc. 2022-2023

API Design



- OpenAPI: Schemas
  - Set the schema to be ‘allOf:’
  - Array (“-“)
    - Ref to FullUser
    - “type: object” like now but just id
  - End of lab

```yaml
schemas:
  FullUser:
    allOf:
      - $ref: '#/components/schemas/PostNewUser'
      - type: object
        properties:
          id:
            type: string
            example: abc123
```

Copyright Brainwash Inc. 2022-2023



- **OpenAPI: Request Bodies**
  - **Can be defined in Components**
  - **Referenced in operations**

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/PostNewUser'
```

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    $ref: '#/components/requestBodies/UserPostBody'
```

```yaml
components:
  requestBodies:
    UserPostBody:
      description: new user request
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PostNewUser'
```

- **End of lab**

Copyright Brainwash Inc. 2022-2023



- **OpenAPI: Responses**
  - **Can be defined in Components**
  - **Referenced in operations**

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    $ref: '#/components/requestBodies/UserPostBody'
  responses:
    2XX:
      description: successful fetch
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/FullUser'
```

```yaml
post:
  summary: create user
  description: store user on server
  operationId: createUser
  requestBody:
    $ref: '#/components/requestBodies/UserPostBody'
  responses:
    2XX:
      $ref: '#/components/responses/UserRespBody'
    default:
      description: Default error sample response
  tags:
    - users
```

```yaml
components:
  responses:
    UserRespBody:
      description: user response
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/FullUser'
```

- **End of lab**

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Responses
  - Arrays
  - /users GET returns an array
  - That can be another schema in another response use in /users GET

```yaml
schemas:
  UserArray:
    type: array
    items:
      $ref: '#/components/schemas/FullUser'
```

```yaml
responses:
  UserArrayResponseBody:
    description: user array response
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/UserArray'
```

```yaml
/users:
  summary: user level operations
  description: create and read users
  get:
    summary: fetch users
    description: read users from server
    operationId: fetchUsers
    responses:
      2XX:
        $ref: '#/components/responses/UserArrayResponseBody'
      default:
        description: Default error sample response
```

  - End of lab

Copyright Brainwash Inc. 2022-2023



- Components
  - Reusable items
    - Request bodies, responses, schemas, parameters, etc.
    - Can become the bulk of your spec
    - Helps keep the paths/operations:
      - Concise
      - Description
      - Many references

Copyright Brainwash Inc. 2022-2023

API Design



- Server Variables
  - Allow for various values
    - Ports
    - Schemes
    - Versions

Copyright Brainwash Inc. 2022-2023

API Design



- Server Variables
  - Insert > Add Servers
  - Variables within { }

```
{scheme}://www.example.com:{port}/{version}
```




Copyright Brainwash Inc. 2022-2023

API Design



- **Server Variables**

```yaml
- url: '{scheme}://www.example.com:{port}/{version}'
  variables:
    scheme:
      default: https
      enum:
        - http
        - https
      description: 'protocol scheme'
    version:
      default: v2
      enum:
        - v2
        - v1
      description: 'version of api'
    port:
      default: '8080'
      enum:
        - '8080'
        - '8000'
      description: 'server port'
```

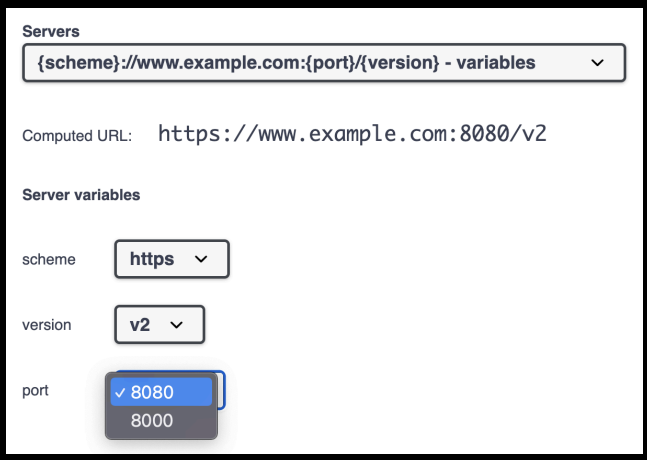

Copyright Brainwash Inc. 2022-2023

API Design: Documenting



Copyright Brainwash Inc. 2022-2023



- OpenAPI: Paths and Parameters
  - May be templated:
    - /users/{userId}
    - /users/{userId}/attempts
  - OpenAPI specifies parameters
    - name
    - in: path, query, header, cookie
    - schema: typically integer or string

```
parameters:
  - name: userId
    in: path
    required: true
    description: Para
    schema:
      type : integer
      format: int64
      minimum: 1
```

Copyright Brainwash Inc. 2022-2023




- OpenAPI: Parameters
  - in:
  - path - URL
  - query - Query String
  - header - request header
  - cookie - Cookie


```
parameters:
  - name: userId
    in: path
    required: true
    description: Paramete
    schema:
      type : integer
      format: int64
      minimum: 1
```

Copyright Brainwash Inc. 2022-2023

API Design

- Lab: /users/{userId}
  - Add /users/{userId}
  - Add GET method
    - Include id parameter of type Integer



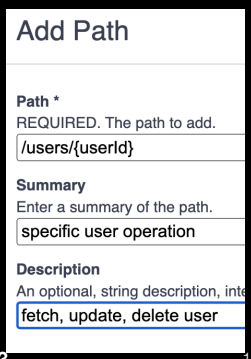




```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
```

Copyright Brainwash Inc. 2022-2023

API Design

- Lab: /users/{userId}
  - Add GET Operation



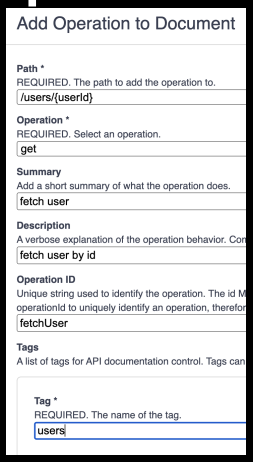


```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
  get:
    summary: fetch user
    description: fetch user by id
    operationId: fetchUser
    responses:
      default:
        description: Default error sample response
    tags:
      - users
```

Copyright Brainwash Inc. 2022-2023



- Lab: /users/{userId}
  - Add GET parameters section (type in editor)
  - Try it out

```
/users/{userId}:
  summary: user based operations
  description: fetch, update and delete user
  get:
    summary: fetch a user
    description: returns a user from the server
    operationId: fetchUser
    parameters:
      - name: userId
        in: path
        required: true
        description: user id
        schema:
          type: string
          example: 1234abc
```

Request URL

```
http://localhost:3000/users/1234abc
```

Server response

Code	Details
200	Response body

```
{
  "id": "1234abc",
  "username": "bear",
  "score": 55,
  "active": true
}
```

Download

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - query - Query String
    - e.g., /users?offset=20

```
- in: query
  name: offset
  schema:
    type: integer
  description: The number of items to skip
```

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - header - request header
    - e.g., X-Request-ID: 77e1c83b-7bb0-437b-bc50-a7a58e5660ac

```yaml
paths:
  /ping:
    get:
      summary: Checks if the server is alive
      parameters:
        - in: header
          name: X-Request-ID
          schema:
            type: string
            format: uuid
          required: true
```

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - cookie - Cookie
  - e.g., Cookie: debug=0; csrftoken=BUSe35dohU3O1MZvDCUOJ

```yaml
parameters:
  - in: cookie
    name: debug
    schema:
      type: integer
      enum: [0, 1]
      default: 0
  - in: cookie
    name: csrftoken
    schema:
      type: string
```

Copyright Brainwash Inc. 2022-2023

API Design



- OpenAPI: Parameters
  - Required: true/false
  - schema
    - Used for primitive types
    - Arrays
    - Serialized (to string) objects
  - content for more complex serialization
    - See https://swagger.io/docs/specification/serialization/

```yaml
parameters:
  - name: userId
    in: path
    required: true
    description: Parameter
    schema:
      type : integer
      format: int64
      minimum: 1
```

Copyright Brainwash Inc. 2022-2023

API Design



- OpenAPI: Parameters
  - May have default values
    - Not needed for required values
  - May have min/max

```yaml
parameters:
  - in: cookie
    name: debug
    schema:
      type: integer
      enum: [0, 1]
      default: 0
  - in: cookie
    name: csrftoken
    schema:
      type: string
```

```yaml
parameters:
  - name: userId
    in: path
    required: true
    description: Parameter
    schema:
      type : integer
      format: int64
      minimum: 1
```

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - May have an example(s)
  - May be an enum

```yaml
parameters:
  - in: query
    name: limit
    schema:
      type: integer
      minimum: 1
    example: 20
```

```yaml
parameters:
  - in: query
    name: status
    schema:
      type: string
      enum:
        - available
        - pending
        - sold
```

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - Parameters shared by multiple methods may be defined on the path level.
  - e.g., Used by GET and DELETE

```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
  parameters:
    - name: userId
      in: path
      required: true
      schema:
        type: string
        example: 1234abc
```

Copyright Brainwash Inc. 2022-2023



- Lab: /users/{userId}
  - Put parameters section on path level
  - Applies to all operations for this path

```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
  parameters:
    - name: userId
      in: path
      required: true
      schema:
        type: string
        example: 1234abc
```

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters
  - May be in components
    - Referenced with $ref

```yaml
components:
  parameters:
    UserId:
      name: userId
      in: path
      required: true
      schema:
        type: string
        example: 1234abc
```

```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
  parameters:
    - $ref: '#/components/parameters/UserId'
```

Copyright Brainwash Inc. 2022-2023



- Lab: /users/{userId}
  - Put parameter in parameters section of components
  - Refer from operation /user/{userId}

```yaml
components:
  parameters:
    UserId:
      name: userId
      in: path
      required: true
      schema:
        type: string
        example: 1234abc
```

```yaml
/users/{userId}:
  summary: specific user operation
  description: fetch, update, delete user
  parameters:
    - $ref: '#/components/parameters/UserId'
```

  - End of lab

Copyright Brainwash Inc. 2022-2023



- OpenAPI: Parameters - Serialization
  - For transmitting data structures/objects
  - Keywords:
    - style - how values are delimited
      - Various by parameter location (e.g., path)
    - explode (boolean)- specifies if values should be separate parameters (e.g., arrays)

Copyright Brainwash Inc. 2022-2023

API Design



- Path Parameters
  - Styles:
    - simple (default)
    - label
    - matrix
  - Explode
    - true
    - false (default)

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: simple - primitive
  - Looks like /rates/{id}
  - Parameter as we've seen it before
  - Required
  - Schema type: integer

```
r.typicode.com/bearc0025/api/rates/1
```

```yaml
/rates/{id}:
  summary: review stuff
  description: operations on item
  get:
    summary: fetch data
    description: returns data from db
    parameters:
      - in: path
        required: true
        name: id
        schema:
          type: integer
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: simple - array
  - Array of integers
  - explode true: /rates/{id*}
  - explode false: /rates/{id}
    - URL the same

```
on-server.typicode.com/bearc0025/api/rates/1,2,4
```

```yaml
/rates/{id*}:
  summary: review stuff
  description: operations on item
  get:
    summary: fetch data
    description: returns data from db
    parameters:
      - in: path
        style: simple
        explode: true
        required: true
        name: id*
        schema:
          type: array
          items:
            type: integer
```

Copyright Brainwash Inc. 2022-2023

API Design




- Styles: simple - object
  - Object
  - explode: false
    - Comma separated

```
-json-
icode.com/bearc0025/api/rates/id,1,text,this%20post
```

```yaml
/rates/{item}:
  summary: review stuff
  description: operations on item
  get:
    summary: fetch data
    description: returns data from db
    parameters:
      - in: path
        style: simple
        explode: false
        required: true
        name: item
        schema:
          type: object
          properties:
            id:
              type: integer
              example: 1
            text:
              type: string
              example: this post
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: simple - object
  - Object
  - explode: true
    - Key/Value pairs

```
/rates/{item*}:
  summary: review stuff
  description: operations on item
  get:
    summary: fetch data
    description: returns data from db
    parameters:
      - in: path
        style: simple
        explode: true
        required: true
        name: item*
        schema:
          type: object
          properties:
            id:
              type: integer
              example: 1
            text:
              type: string
              example: this post
```

```
-
.com/bearc0025/api/rates/id=1,text=this%20post
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: label - primitive/array
  - Dot-prefixed (aka Label Expansion)
    - {.item}

```
/rates/{.item}:
  summary: review stuff
  description: operations on ite
  get:
    summary: fetch data
    description: returns data fr
    parameters:
      - in: path
        style: label
        explode: false
        required: true
        name: .item
        schema:
          type: integer
```

```
Request URL

https://my-json-server.typicode.com/bearc0025/api/rates/.1
```

- {.item*} for array

```
URL

://my-json-server.typicode.com/bearc0025/api/rates/.1.2
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: label - object
  - explode: false

```
RL

//my-json-
.typicode.com/bearc0025/api/rates/.id.1.text.this%20post
```

  - explode: true

```
y-json-
picode.com/bearc0025/api/rates/.id=1.text=this%20post
```

```yaml
parameters:
  - in: path
    style: label
    explode: false
    required: true
    name: .item
    schema:
      type: object
      properties:
        id:
          type: integer
          example: 1
        text:
          type: string
          example: this post
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: matrix
  - Primitive

```
Request URL
https://my-json-server.typicode.com/bearc0025/api/rates/;item=1
```

  - Array - Explode
    - False

```
Request URL
https://my-json-server.typicode.com/bearc0025/api/rates/;item=1,2
```

    - True

```
Request URL
https://my-json-server.typicode.com/bearc0025/api/rates/;item=1;item=2
```

Copyright Brainwash Inc. 2022-2023

API Design



- Styles: matrix
  - Object
    - Explode false

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates/;item=id,1,text,this%20post
```

    - Explode true

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates/;id=1;text=this%20post
```

Copyright Brainwash Inc. 2022-2023

API Design



- Query Parameters
  - Styles
    - form
    - spaceDelimited
    - pipeDelimited
    - deepObject

Copyright Brainwash Inc. 2022-2023

Query Parameter Styles

- form

```
/rates:
  summary: review stuff
  description: operations on item
  get:
    summary: fetch data
    description: returns data from db
    parameters:
      - in: query
        name: item
        style: form
        explode: true
        schema:
          type: integer
```

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item=1
```

- Array
  - Explode false

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item=1,2
```

  - Explode true

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item=1&item=2
```

Copyright Brainwash Inc. 2022-2023



- Query Parameter Styles
  - spaceDelimited - (explode false)

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item=1%202
```

  - pipeDelimited - (explode false)

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item=1|2
```

  - For explode = true, looks like form

Copyright Brainwash Inc. 2022-2023



- Query Parameter Styles
  - deepObject (Object)
    - %5B = [
    - %5D =]
    - ?item[id]=1&item[text]=this post

Request URL

```
https://my-json-server.typicode.com/bearc0025/api/rates?item%5Bid%5D=1&item%5Btext%5D=this%20post
```

Copyright Brainwash Inc. 2022-2023



- Header, Cookie Serialization
- See https://swagger.io/docs/specification/serialization/

Header Parameters

Header parameters always use the `simple` style, that is, comma-separated values. This corresponds to the `{param_name}` URI template. An optional `explode` keyword controls the object serialization. Given the request header named `X-MyHeader`, the header value is serialized as follows:

style	explode	URI template	Primitive value X-MyHeader = 5	Array X-MyHeader = [3, 4, 5]	Object X-MyHeader = {"role": "admin", "firstName": "Alex"}
simple *	false *	{id}	X-MyHeader: 5	X-MyHeader: 3,4,5	X-MyHeader: role,admin,firstName,Alex
simple	true	{id*}	X-MyHeader: 5	X-MyHeader: 3,4,5	X-MyHeader: role=admin,firstName=Alex

* Default serialization method

Cookie Parameters

Cookie parameters always use the `form` style. An optional `explode` keyword controls the array and object serialization. Given the cookie named `id`, the cookie value is serialized as follows:

style	explode	URI template	Primitive value id = 5	Array id = [3, 4, 5]	Object id = {"role": "admin", "firstName": "Alex"}
form *	true *		Cookie: id=5		
form	false	id={id}	Cookie: id=5	Cookie: id=3,4,5	Cookie: id=role,admin,firstName,Alex

* Default serialization method

Copyright Brainwash Inc. 2022-2023

- Lab: Swagger DELETE with ID
  - Move {id} parameter to components
    - (If haven't already)




```yaml
/posts/{postId}:
  summary: individual post operations
  description: fetch, delete, update
  parameters:
    - $ref: '#/components/parameters/PostId'
```

Copyright Brainwash Inc. 2022-2023

- Lab: Swagger DELETE with ID
  - Add DELETE operation/method to /users/{userId} (Insert -> Add Operation)
  - Test
  - End of Lab




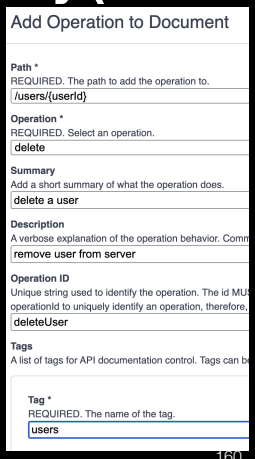


```yaml
delete:
  summary: delete a user
  description: remove user from server
  operationId: deleteUser
  responses:
    default:
      description: Default error sample response
  tags:
    - users
```

Copyright Brainwash Inc. 2022-2023

- **Lab: Swagger PATCH with ID**
  - **Add patch operation to /users/{userId}**
  - **Very similar to post on /users**
  - **NOTE: Be sure to add the requestBody**
  - **Test**

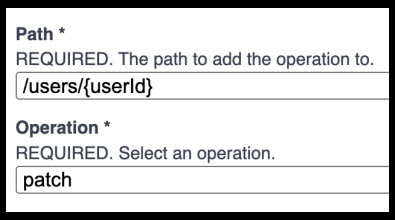



```yaml
patch:
  summary: update a user
  description: store changes on server
  operationId: updateUser
  requestBody:
    $ref: '#/components/requestBodies/UserPostBody'
  responses:
    default:
      description: Default error sample response
  tags:
    - users
```

Copyright Brainwash Inc. 2022-2023

- **Lab: Swagger PATCH with ID**
  - **Update a user and verify the changes made are stored and existing values are otherwise not changed**







Copyright Brainwash Inc. 2022-2023

API Design: Design First



Copyright Brainwash Inc. 2022-2023

API Design: Design First

- **Best for stability/maintainability**
- **Requires commitment**
  - **Keep up to date later**
- **Ideally know all data/endpoints**
- **Mocks/test**
- **Client feedback is earlier**
- **Benefits from code generators**
  - **Code can be questionable**



Copyright Brainwash Inc. 2022-2023


API Design: Design First

- What could go wrong?
  - Reality - backend/db isn't as expected when implemented
  - Client needs aren't served
  - Large/many queries for little data
- Good for exposing data to unknown clients and uses



Copyright Brainwash Inc. 2022-2023


API Design: Code First



Copyright Brainwash Inc. 2022-2023

API Design: Code First

- Best for speed
- Flexible
- Doesn't solve problems that don't exist
- Uncovers problems without design
- Documentation suffers
- Harder to maintain/communicate



Copyright Brainwash Inc. 2022-2023

API Design: Code First

- What could go wrong?
  - Code doesn't map to endpoints, parameters
  - Doc/communication fails
  - API solidification causes delays
- Good for in-house data and quick updates internally (especially for small, tight teams)



Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing



- **Benefits**
  - **Agnostic**
  - **Isolated**
  - **Repeatable**
  - **Fast**

Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing



- **Focus On What You're Testing**
  - **Functionality = Unit Tests**
  - **GUI = UI Tests**
  - **API = Endpoints, Format, etc.**
- **Errors**
  - **Proper codes**
  - **Messages**
  - **Graceful failures**

Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing




- Tools
  - Mock servers
  - Postman, Insomnia, Paw, etc.
- Fully Fleshed out OpenAPI
  - Endpoints & Methods
  - Request Bodies
  - Responses
  - Components/Model
- SDK Generation if applicable

Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing




- Insomnia
  - "Chai is a BDD / TDD assertion library for node and the browser that can be delightfully paired with any javascript testing framework."



Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing


- **Insomnia**
  - **https://www.chaijs.com/api/bdd/**

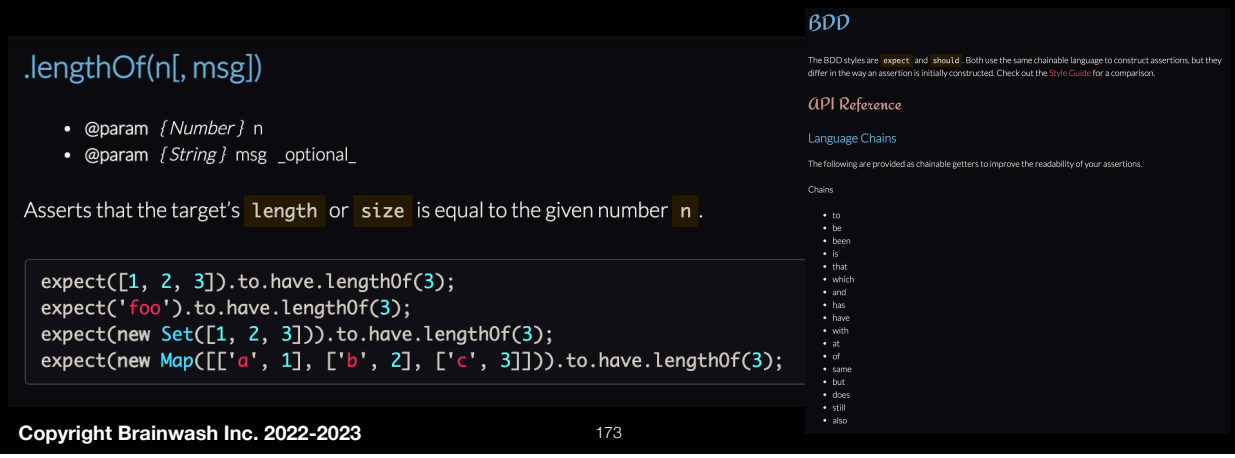

Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing

- **Insomnia**
  - **Create Test Suite**
  - **Add tests and 'expects'**

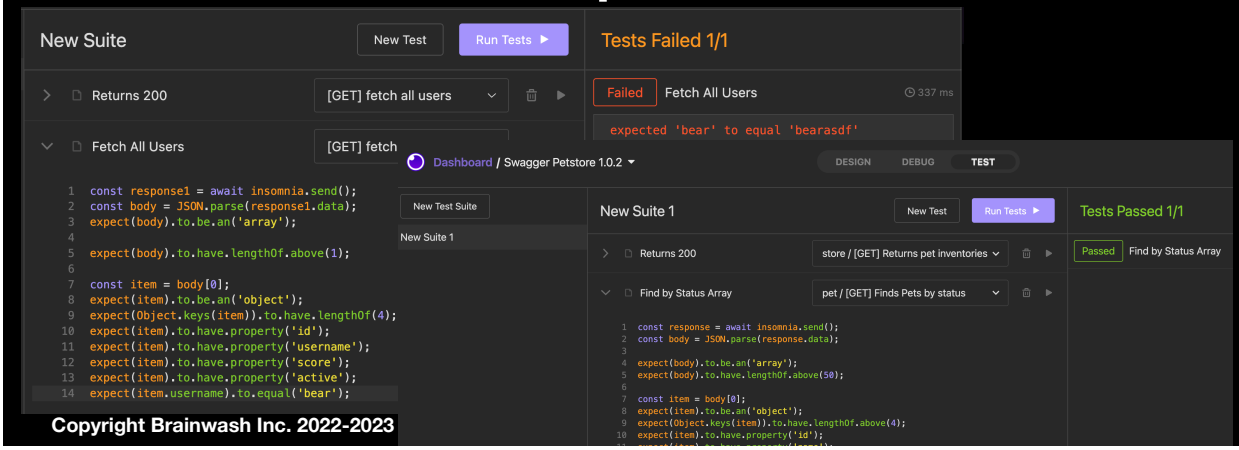

Copyright Brainwash Inc. 2022-2023

API Design: Automated Testing



- Insomnia
  - Create Test Suite
  - Add tests and 'expects'

```
const response1 = await insomnia.send();

expect(response1.status).to.equal(200, "not 200");

const body = JSON.parse(response1.data);

expect(body).to.be.an('array');
expect(body).to.have.lengthOf.greaterThan(0);
expect(body[0]).to.have.property('id');
expect(body[0]).to.have.property('username');
```

Copyright Brainwash Inc. 2022-2023


API Design: Automated Testing



- Insomnia and other tools can…
  - Lint your spec
    - Look for and trap small issues with big effects in syntax and similar
  - Run Tests
    - CI/CD on checkin, automated
  - Define config
  - Generate Code, Documentation

Copyright Brainwash Inc. 2022-2023


API Design: Legacy Systems



- What is the Legacy system?
- How to map to REST nouns
  - What are the data?
  - Tables? Columns? Join?
  - e.g., Report generation -> /report
- Focus on API, state (not functionality)
- API might be a facade
- Treat the client and server as equals

Copyright Brainwash Inc. 2022-2023


API Design: Legacy Systems



- Is the Legacy system based on database tables?
  - Nouns may be based on tables
  - Verbs convert straight from CRUD
  - Functionality can be minimal
  - Authentication always a concern

Copyright Brainwash Inc. 2022-2023


API Design: Legacy Systems



- Is the Legacy system based on functionality?
  - Nouns may be based on results
  - May only have GET for some endpoints (e.g., /reports)
  - Authentication always a concern

Copyright Brainwash Inc. 2022-2023

API Design: Legacy Systems



- Is the Legacy system based on functionality?
  - May use route aliases for grouping or common requests
  - e.g., /reports/today, /reports/yest

Copyright Brainwash Inc. 2022-2023

API Design: Versioning



Copyright Brainwash Inc. 2022-2023

API Design: Versioning



- **Versioning**
  - **In URL**
    - **Easy, clear**
    - **Requires URL changes for clients**
    - **…example.com/api/v2/reports/34**

Copyright Brainwash Inc. 2022-2023

API Design: Versioning



- In Header
  - Limits clients - requires header
  - Accept Header:
    - e.g., Accept: application/ vnd.example+json;version=1.0
  - Custom Header:
    - e.g., Accept-version: v1

Copyright Brainwash Inc. 2022-2023

API Design: Versioning



- Both
  - Major in URL - defaults to latest minor
  - Allows for updates

Copyright Brainwash Inc. 2022-2023

API Design: Versioning



- Backward Compatible
  - Old versions -> old code
  - Or new code's version of functionality
  - Behind the scenes implementation

Copyright Brainwash Inc. 2022-2023

API Design: Versioning



- Deprecated version/endpoint
  - Freeze code
    - Reliable
    - Easier to isolate and update/fix

Copyright Brainwash Inc. 2022-2023

API Design: Security by Design



Copyright Brainwash Inc. 2022-2023

API Design: Security by Design

- Consider security as 1st class entity
- SSL
- HTTP Basic Auth (header)
- API keys, secrets
  - Dangerous, Changes
  - http://www.omdbapi.com/?apikey=<api key>&t=memento
- OAuth
  - Authentication, Authorization
  - JWT (Tokens)
    - ID
    - Access



```
GET /api/rest/contracts/status?contractId=42 HTTP/1.1
Authorization: Basic ZXh0ZXJuYWwtc2VydmljZW5hbWU6YXBpa2V5
```

Copyright Brainwash Inc. 2022-2023

API Design: Security by Design

- Authentication vs Authorization
  - Client needs to be authenticated
    - e.g., username + password
  - Results in authorization
    - e.g., token
    - Has certain permissions (and not others)



Copyright Brainwash Inc. 2022-2023

API Design: JSON Web Tokens


- JWT
- https://jwt.io/introduction
  - <header>.<payload>.<signature>
- https://openid.net/developers/jwt/
- Authentication/Authorization
  - Access - http header
  - Expiration - refresh
  - SDKs often handle bulk
- Authorize by user/role



Copyright Brainwash Inc. 2022-2023

API Design: Security by Design

- **Authenticate and Authorize**

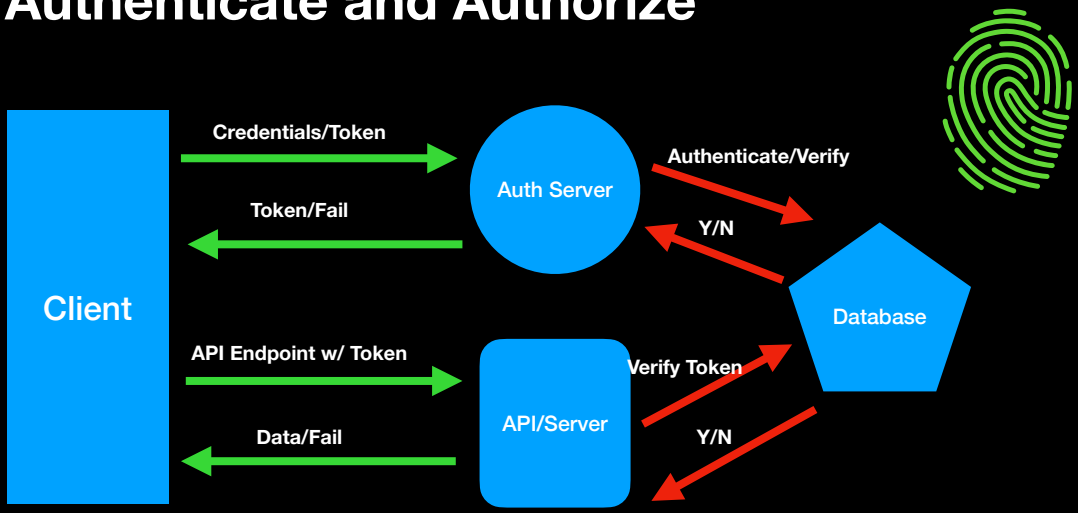

Copyright Brainwash Inc. 2022-2023

API Design: Security by Design

- **securitySchemes in components for reuse**

```yaml
components:
  securitySchemes:

    BasicAuth:
      type: http
      scheme: basic

    BearerAuth:
      type: http
      scheme: bearer

    ApiKeyAuth:
      type: apiKey
      in: header
      name: X-API-Key

    OpenID:
      type: openIdConnect
      openIdConnectUrl: https://example.com/.well-known/openid-config

    OAuth2:
      type: oauth2
      flows:
        authorizationCode:
          authorizationUrl: https://example.com/oauth/authorize
          tokenUrl: https://example.com/oauth/token
          scopes:
            read: Grants read access
            write: Grants write access
            admin: Grants access to admin operations
```

Copyright Brainwash Inc. 2022-2023

API Design: Security by Design

- **Example: Cognito**



```yaml
components:
  securitySchemes:
    MyAppAuth:
      type: "apiKey"
      name: "token"
      in: "header"
      x-amazon-apigateway-authtype:
        "cognito_user_pools"
```

```yaml
paths:
  /v2/alarm:
    get:
      responses:
        "200":
          description: "200 response"
          content:
            application/json:
              schema:
                $ref: "#/components/sc
      security:
      - MyAppAuth: []
```

Copyright Brainwash Inc. 2022-2023

Security



- **Security Scheme Object**
- **securitySchemes in Components**
  - **Supported schemes:**
    - **HTTP authentication**
    - **API key (header, cookie, query)**
    - **Mutual TLS (server & client certs)**
    - **OAuth2 (implicit*, password, client credentials, authorization code)**

*** deprecated**

Copyright 2023 Brainwash Inc.



- Fields
  - type : string
    - Values: apiKey, http, mutualTLS, oauth2, openIdConnect
  - description : string
    - Text description

  - Each type has their own fields…

Copyright 2023 Brainwash Inc.


```
type: apiKey
name: api_key
in: header
```



- apiKey fields:
  - name
    - The name of the header, cookie or query string parameter where the API key is passed.
  - in
    - Where the API key is passed: query, header, cookie

Copyright 2023 Brainwash Inc.

```
type: http
scheme: bearer
bearerFormat: JWT
```



- http fields:
  - scheme
    - HTTP authorization used
    - Values should be in IANA registry
      - e.g., Basic, Bearer, etc.
  - bearerFormat (for http bearer scheme)
    - Hint for token format (e.g., JWT)

Copyright 2023 Brainwash Inc.



- oauth2 fields:
  - flows (Object)
    - implicit
    - password
    - clientCredentials
    - authorizationCode

- The above 4 fields are flow objects…

Copyright 2023 Brainwash Inc.

Security



- flow fields:
  - authorizationURL (implicit and authorizationCode)
  - tokenURL (password, clientCredentials, authorizationCode)
  - refreshURL (all)
  - scopes (all) - [string,string]
    - e.g., "write:pets": "modify…"
  - Example…

Copyright 2023 Brainwash Inc.

Security



```yaml
type: oauth2
flows:
  implicit:
    authorizationUrl: https://example.com/api/oauth/dialog
    scopes:
      write:pets: modify pets in your account
      read:pets: read your pets
  authorizationCode:
    authorizationUrl: https://example.com/api/oauth/dialog
    tokenUrl: https://example.com/api/oauth/token
    scopes:
      write:pets: modify pets in your account
      read:pets: read your pets
```

Copyright 2023 Brainwash Inc.

Security



```yaml
securitySchemes:
  api_key:
    type: apiKey
    name: api_key
    in: header
  petstore_auth:
    type: oauth2
    flows:
      implicit:
        authorizationUrl: http://example.org/api/oauth/dialog
        scopes:
          write:pets: modify pets in your account
          read:pets: read your pets
```

Copyright 2023 Brainwash Inc.

Security



- Security Requirement for Operation
  - List required security schemes
    - If multiple, all must be satisfied
  - Refs Security Schemes in Components
  - For oauth2 and openIdConnect
    - May include required scopes
  - For others
    - May include role names

```yaml
security:
- petstore_auth:
  - write:pets
  - read:pets
```

```yaml
security:
- MyAppAuth: []
```

Copyright 2023 Brainwash Inc.

Security



- See https://github.com/OAI/OpenAPI-Specification/blob/main/versions/3.1.0.md#security-scheme-object

Security Scheme Object

Defines a security scheme that can be used by the operations.

Supported schemes are HTTP authentication, an API key (either as a header, a co
mutual TLS (use of a client certificate), OAuth2's common flows (implicit, passwo
code) as defined in RFC6749, and OpenID Connect Discovery. Please note that a
deprecated by OAuth 2.0 Security Best Current Practice. Recommended for most
flow with PKCE.

Fixed Fields


Field Name	Type	Applies To	
type	`string`	Any	**REQUIRED**. The type are `"apiKey"`, `"http` `"openIdConnect"`.
description	`string`	Any	A description for secu be used for rich text r
name	`string`	`apiKey`	**REQUIRED**. The name

Copyright 2023 Brainwash Inc.

Security



- **SEB**

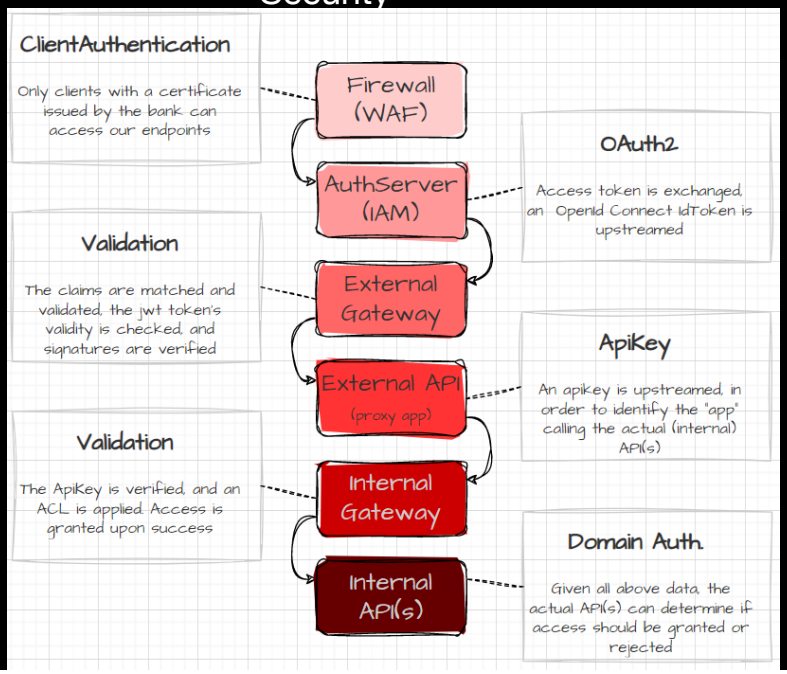

Copyright 2023 Brainwash Inc.



• OpenAPI SEB Examples

```
# ------------------------------------------------------------------------------------------
# External API Definition for TPP or bank-customers (consumed externally, and published on the developer portal)
# ------------------------------------------------------------------------------------------

openapi: 3.0.1
...
paths:
  /accounts:
    get:
    security:
      sebOAuth2: <api-name>:read
    ...
components:
  securitySchemes:
    sebOAuth2:
      type: oauth2
      description: This API uses OAuth 2 with the client credential grant flow.
      flows:
        authorizationCode:
          authorizationUrl: https://id.seb.se/tpp/authorize
          tokenUrl: https://id.seb.se/tpp/token
          scopes:
            <api-name>: Access to the api
security:
  - sebOAuth2:
      - <api_name>
```

Copyright 2023 Brainwash Inc.



• OpenAPI SEB Examples

```
# ------------------------------------------------------------------------------------------
# External Corporate API Definition (consumed externally, and published on the developer portal)
# ------------------------------------------------------------------------------------------
openapi: 3.0.1
...
paths:
  /accounts:
    get:
    security:
      sebOAuth2: <api-name>:read
    ...
components:
  securitySchemes:
    sebOAuth2:
      type: oauth2
      description: This API uses OAuth 2 with the client credential grant flow.
      flows:
        clientCredentials:
          tokenUrl: https://s2s-api.sebgroup.com/mga/sps/oauth/oauth20/token
          scopes:
            <api-name>: Access to the api
security:
  - sebOAuth2:
      - <api_name>
```

Copyright 2023 Brainwash Inc.



- **OpenAPI SEB Examples**

```
# ------------------------------------------------------------------------------------------------
# Proxy app API Definition (published on the external gateway)
# ------------------------------------------------------------------------------------------------

openapi: 3.0.1
...

paths:
  /accounts:
    get:
    security:
      SebOpenId: <api_name>:read
    ...
components:
  securitySchemes:
    SebOpenId:
      type: openIdConnect
      openIdConnectUrl: https://https://sso.sebank.se/auth/.well-known/openid-configuration

security:
  - SebOpenId:
      - <api_name>
```

Copyright 2023 Brainwash Inc.



- **OpenAPI SEB Examples**

```
# ------------------------------------------------------------------------------------------------
# Internal API Definition (consumed by other internal APIs or internal applications)
# ------------------------------------------------------------------------------------------------
openapi: 3.0.1
...
paths:
  /accounts:
    get:
    security:
      SebBearer: <api-name>:read


components:
  securitySchemes:
    SebApiKey:
      type: apiKey
      in: header
      name: X-ApiKey

    SebBearer:
      type: http
      scheme: bearer
      in: header
      name: JWT-Assertion
      bearerFormat: JWT

security:
  - SebApiKey: []
  - SebBearer:
    - <api-name>
```

Copyright 2023 Brainwash Inc.

- Lab: Pet Store API
  - https://petstore.swagger.io/
  - Load JSON
  - Copy text to jsonlint.com
    - Validate and review

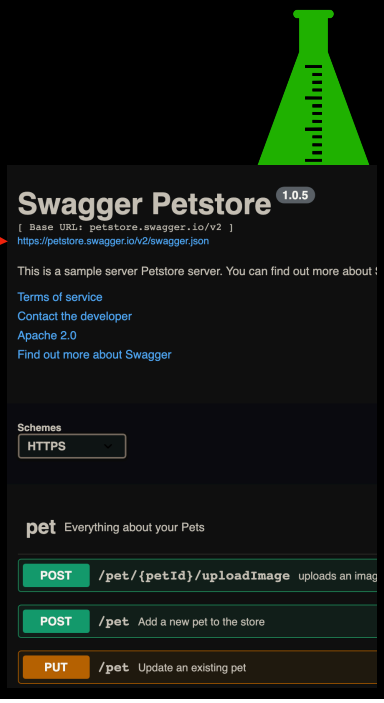


Copyright Brainwash Inc. 2022-2023


- Lab: Pet Store API
  - Notice that it's swagger 2.0 JSON
  - But largely similar in content



Copyright Brainwash Inc. 2022-2023

- **Lab: Pet Store API**
  - **Copy JSON into editor.swagger.io**
  - **Review the generated docs**
  - **Test**
  - **End of lab**



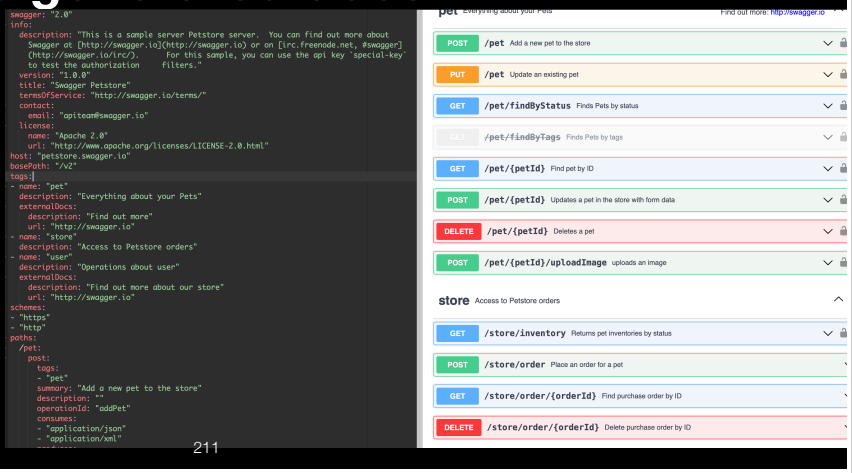

Copyright Brainwash Inc. 2022-2023

- **Videos:**
- **Post assessment survey questions**

APIs- Application Programming Interface: Executive Briefing
Dan Appleman


Designing RESTful Web APIs
Shawn Wildermuth

REST Fundamentals
Howard Dierking

Introduction to OAuth2, OpenID Connect and JSON Web Tokens (JWT)
Dominick Baier

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - UI
    - Functional
    - Security
    - Performance/Load
    - Error
    - Validation - end-to-end

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - UI
      - Creating Requests
      - Data format
      - Receiving Responses
    - May be client (not yours)
    - May be SDK

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - Functional
      - Back end
      - Code logic
      - Request Processing
      - Data Gathering, Formatting
      - Response Creation

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - Security
      - Authentication
      - Authorization
      - Access Prevention

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - Performance/Load
      - Process Speed
      - Scalability
      - Cost
      - DOS Security
      - Response Time

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Principles
  - Types of testing related to API:
    - Error
      - Fail Gracefully
      - Appropriate Status/Error Codes
      - Messages
      - No Secrets
      - Logging

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Best Practices
  - Use Realistic Data
    - Mock Data
    - Real Data
    - All Sizes
    - Include Errors

Copyright Brainwash Inc. 2022-2023

API Automated Testing




- Best Practices
  - Test Success and Fail
    - Don’t just test that it works
    - Wild Testing



Copyright Brainwash Inc. 2022-2023

API Automated Testing




- Best Practices
  - Drive Tests with Data
    - Map test data to outcomes
    - Repeatable
    - Easily Extendable
    - Fail Conditions Added

```
(100, 0.5)
(200, 0.75)
(300, 0.85)
(0, 0.0)
```

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Best Practices
  - Logging/Analytics
    - Store API traffic
    - Analyze for changes
    - Helps with bug research

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Best Practices
  - Performance Minded
    - Functional Tests can be reused
      - Performance
      - Scalability
      - Security

Copyright Brainwash Inc. 2022-2023


API Automated Testing



- Best Practices
  - Automation
    - Time $aving
    - Reliable/Repeatable
    - Agnostic to other software/processes
    - Right tool for the right job
      - Insomnia, Postman, Stoplight, etc.
      - CI/CD

Copyright Brainwash Inc. 2022-2023


API Automated Testing




- Integration Testing
  - End-to-End
  - Doesn't have to be last
  - May take more time than expected
  - Maybe (automated) UI driven
    - SDK
    - Client Agnostic

Copyright Brainwash Inc. 2022-2023

API Automated Testing




- Testing with Insomnia
  - Debug > Ctrl+Send menu
    - Delay, Repeat, etc.
  - Plugins
    - https://insomnia.rest/plugins
  - CLI
    - https://insomnia.rest/product/automated-testing

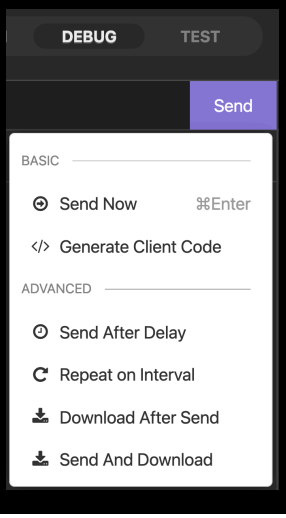

Copyright Brainwash Inc. 2022-2023


API Design: Automated Testing




- Automated Testing with Insomnia
- inso CLI
  - Lint your spec
    - Look for and trap small issues with big effects in syntax and similar
  - Run Tests
    - CI/CD on checkin, automated
  - Define config
  - Generate Code, Documentation


Copyright Brainwash Inc. 2022-2023

API Automated Testing




- CI/CD with Insomnia
  - Create git repo and not URL
  - In Insomnia select Setup 'Git Sync' > Repository Settings
  - Fill out the form

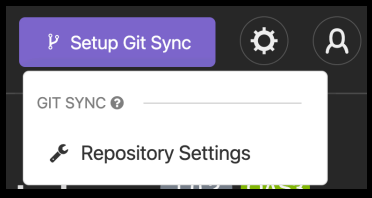


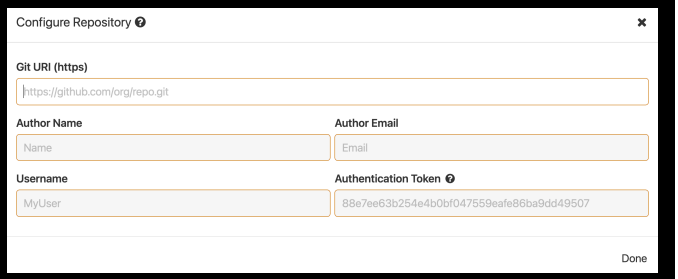


Copyright Brainwash Inc. 2022-2023



- Token
  - Click ? For links to instructions
  - Sync with Github or similar

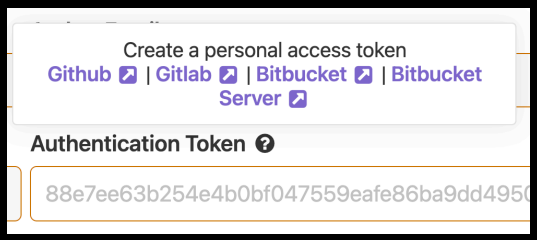

Copyright Brainwash Inc. 2022-2023






- Insomnia CLI
  - Install CLI
  - Download:
    - https://github.com/Kong/insomnia/releases/tag/lib@3.14.0
  - Docker image:
    - https://hub.docker.com/r/kong/inso

Copyright Brainwash Inc. 2022-2023

API Automated Testing



- Insomnia CLI
  - Execute: inso run test
    - Select suite
    - Select environment
    - View Results

```
Bear-MBP:~ bearc2020$ inso run test
? Select a document or unit test suite …
Swagger Petstore 1.0.2 spc_6d22e0
  | New Suite 1 uts_07beec
My API spc_e4343f
  | Test 1 uts_276215
```

```
Bear-MBP:~ bearc2020$ inso run test
✔ Select a document or unit test suite · Test 1 – uts_276215
? Select an environment …
OpenAPI env env_env_65edc1
```


```
Bear-MBP:~ bearc2020$ inso run test
✔ Select a document or unit test suite · Test 1 – uts_276215
✔ Select an environment · OpenAPI env – env_env_65edc1

  Test 1
    ✓ Returns 200 (1278ms)

  1 passing (1s)
```

Copyright Brainwash Inc. 2022-2023

API Automated Testing



- Insomnia CLI
  - Note the suite and env identifiers/names
  - Run tests directly

```
Bear-MBP:~ bearc2020$ inso run test
✔ Select a document or unit test suite · Test 1 – uts_276215
✔ Select an environment · OpenAPI env – env_env_65edc1

  Test 1
    ✓ Returns 200 (1278ms)


  1 passing (1s)
```

```
Bear-MBP:~ bearc2020$ inso run test uts_276215 --env env_env_65edc1

  Test 1
    ✓ Returns 200 (1144ms)

  1 passing (1s)
```

Copyright Brainwash Inc. 2022-2023




- **Insomnia CLI**
  - **inso lint spec**

```
Bear-MBP:~ bearc2020$ inso lint spec
? Select an API Specification …
Swagger Petstore 1.0.2 spc_6d22e0
My API spc_e4343f
```

```
Bear-MBP:~ bearc2020$ inso lint spec
✔ Select an API Specification · My API - spc_e4343f
No linting errors. Yay!
```

Copyright Brainwash Inc. 2022-2023




- **Insomnia CLI**
  - **inso scripts**
  - **Config files**
    - **Specify a name and what to run**

```
scripts:
  mylint: inso lint spec "My API"
```


- **Run with script (or w/o if name is unique)**

```
Bear-MBP:insomnia bearc2020$ inso mylint
No linting errors. Yay!
Bear-MBP:insomnia bearc2020$ inso script mylint
No linting errors. Yay!
```


Copyright Brainwash Inc. 2022-2023




- Insomnia CI/CD Tests
  - e.g., Github Actions
  - https://docs.github.com/en/actions/learn-github-actions/understanding-github-actions
  - "New Workflow"

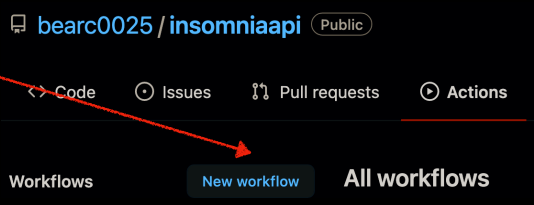

Copyright Brainwash Inc. 2022-2023



- Choose template
  - "Set up this workflow"
  - Review file

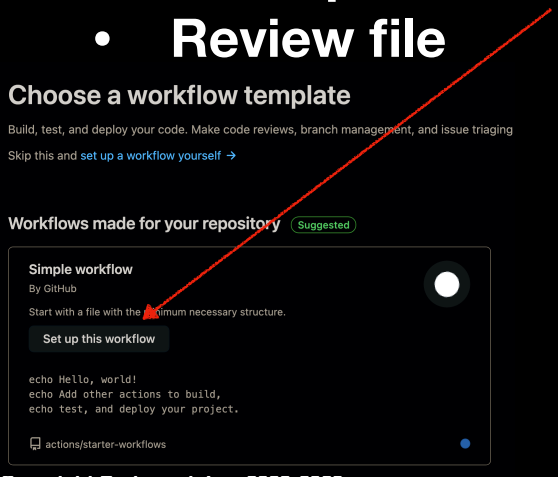


```yaml
# This is a basic workflow to help you get started with Actions

name: CI

# Controls when the workflow will run
on:
  # Triggers the workflow on push or pull request events but only for the master branch
  push:
    branches: [ master ]
  pull_request:
    branches: [ master ]

  # Allows you to run this workflow manually from the Actions tab
  workflow_dispatch:

# A workflow run is made up of one or more jobs that can run sequentially or in parallel
jobs:
  # This workflow contains a single job called "build"
  build:
    # The type of runner that the job will run on
    runs-on: ubuntu-latest


    # Steps represent a sequence of tasks that will be executed as part of the job
    steps:
      # Checks-out your repository under $GITHUB_WORKSPACE, so your job can access it
      - uses: actions/checkout@v2

      # Runs a single command using the runners shell
      - name: Run a one-line script
        run: echo Hello, world!

      # Runs a set of commands using the runners shell
      - name: Run a multi-line script
        run: |
          echo Add other actions to build,
          echo test, and deploy your project.
```

Copyright Brainwash Inc. 2022-2023

API Automated Testing




- https://docs.insomnia.rest/inso-cli/continuous-integration
- Copy 'steps' from Insomnia example at site above
- Replace command parameters with your project names/ids
- Use newer version

```yaml
# .github/workflows/test.yml

name: Test

jobs:
  Linux:
    name: Validate API spec
    runs-on: ubuntu-latest
    steps:
      - name: Checkout branch
        uses: actions/checkout@v1
      - uses: kong/setup-inso@v1
        with:
          inso-version: 2.4.0
      - name: Lint
        run: inso lint spec "Designer Demo" --ci
      - name: Run test suites
        run: inso run test "Designer Demo" --env UnitTest --ci
      - name: Generate declarative config
        run: inso generate config "Designer Demo" --type declarative --ci
```


API Automated Testing



- Paste steps into template
  - Change the inso-version to a recent version: 3.13.0
  - On push…
    - Checkout
    - Install
    - Lint
    - Tests
    - Generate config

```yaml
# This is a basic workflow to help you get started with Actions


name: CI

# Controls when the workflow will run
on:
  # Triggers the workflow on push or pull request events but only for the master branch
  push:
    branches: [ master ]

  # Allows you to run this workflow manually from the Actions tab
  workflow_dispatch:

# A workflow run is made up of one or more jobs that can run sequentially or in parallel
jobs:
  # This workflow contains a single job called "build"
  build:
    # The type of runner that the job will run on
    runs-on: ubuntu-latest


    # Steps represent a sequence of tasks that will be executed as part of the job
    steps:
      - name: Checkout branch
        uses: actions/checkout@v1
      - uses: kong/setup-inso@v1
        with:
          inso-version: 2.4.0
      - name: Lint
        run: inso lint spec "My API" --ci
      - name: Run test suites
        run: inso run test uts_276215 --env "OpenAPI env" --ci
      - name: Generate declarative config
        run: inso generate config "My API" --type declarative --ci
```




- **Change the name of the file**




- **When saved, .github/workflows with that file will be added to your repo**



Copyright Brainwash Inc. 2022-2023




- **Commit the file**
- **Add name and comments as you like**
- **'Commit new file'**

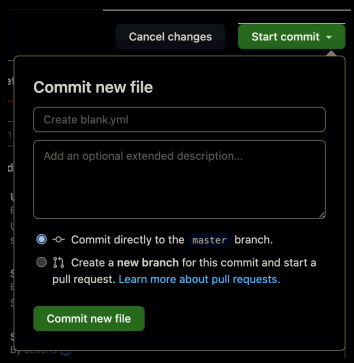


- **Pull in Insomnia to keep in sync!**

Copyright Brainwash Inc. 2022-2023


API Automated Testing




- **Go back to 'Actions' and see your action is in progress**




- **Click it for details**






- **Actions shows status**




Copyright Brainwash Inc. 2022-2023


API Automated Testing




- **Make a change in Insomnia**
- **Commit and Push**
- **Verify action runs**



- **Verify success (or failure)**



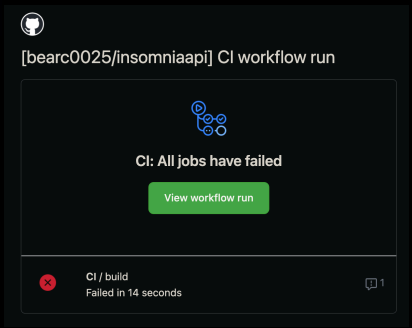

- **End of lab**

Copyright Brainwash Inc. 2022-2023


Tutorials

Jetty Web API Servlet






- Lab: Java Server
- Note: This is not meant to be an exhaustive st… by-step for configuring Jetty but may be helpful:
  - Jetty: https://www.eclipse.org/jetty/
  - Unzip
  - Set env var:
    - JETTY_HOME=/Users/bearc2020/Downloads/jetty-home-11.0.5
  - Start server:
    - java -jar start.jar
  - Load http://localhost:8080/




Copyright Brainwash Inc. 2022-2023




- On same level as jetty-home-<ver>
  - Create jetty-base dir on same level as jetty-home…
  - Run:
  - java -jar start.jar jetty.base=/path/to/your/jetty-base --add-module=server,http,deploy,annotations
  - Change dir to your jetty-base and run:
  - java -jar /path/to/your/jetty-home/start.jar --add-module=server,http,deploy,annotations

Copyright Brainwash Inc. 2022-2023

API Design: Java Server and Client




- Under the jetty-base/webapps dir
- Create a PersonServlet dir
- Inside PersonServlet create src and WEB-INF dirs
  - src is for source code but can be located anywhere
  - WEB-INF is for configuration, classes and libraries




Copyright Brainwash Inc. 2022-2023

API Design: Java Server and Client




- Download java-json.jar from here:
- java-json/java-json.jar.zip
- Copy that to the src and WEB-INF/lib directories
- Optional: Copy various source files into the src directory




Copyright Brainwash Inc. 2022-2023

API Design: Java Server and Client




- Compile the various .java files e.g.,
- javac -cp <path to jetty home>/lib/jetty-jakarta-servlet-api-5.0.2.jar:./java-json.jar:. <filename>.java
  - NOTE: Not all java files require the serlet api and json jar files.
- Copy the class files into
  - WEB-INF/classes



Copyright Brainwash Inc. 2022-2023

API Design: Java Server and Client




- Create the web.xml file under the WEB-INF dir
  - Boilerplate…

```
<web-app
    xmlns="http://xmlns.jcp.org/xml/ns/javaee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://xmlns.jcp.org/xml/ns/javaee
        http://xmlns.jcp.org/xml/ns/javaee/web-app_3_1.xsd"
    version="3.1">
```

Copyright Brainwash Inc. 2022-2023

- **Servlet(s)…**



```
<servlet>
    <servlet-name>PersonServlet</servlet-name>
    <servlet-class>PersonServlet</servlet-class>
</servlet>


<servlet-mapping>
    <servlet-name>PersonServlet</servlet-name>
    <url-pattern>/people/*</url-pattern>
</servlet-mapping>

<servlet>
    <servlet-name>AuthServlet</servlet-name>
    <servlet-class>AuthServlet</servlet-class>
</servlet>

<servlet-mapping>
    <servlet-name>AuthServlet</servlet-name>
    <url-pattern>/auth</url-pattern>
</servlet-mapping>
```

Copyright Brainwash Inc. 2022-2023

- **CORS (Cross-Origin Resource Sharing) and end…**



```
    <filter>
        <filter-name>cross-origin</filter-name>
        <filter-class>org.eclipse.jetty.servlets.CrossOriginFilter</filter-class>
        <init-param>
            <param-name>allowedOrigins</param-name>
            <param-value>*</param-value>
        </init-param>
        <init-param>
            <param-name>allowedMethods</param-name>
            <param-value>GET,POST</param-value>
        </init-param>
        <init-param>
            <param-name>allowedHeaders</param-name>
            <param-value>X-Requested-With,Content-Type,Accept,Origin,Authorization</param-value>
        </init-param>
    </filter>

    <filter-mapping>
        <filter-name>cross-origin</filter-name>
        <filter-pattern>/*</filter-pattern>
    </filter-mapping>

</web-app>
```

Copyright Brainwash Inc. 2022-2023


API Design: Java Server and Client




- With the env var, you can start jetty from other dirs.
- Restart jetty from the jetty-base dir:
  - java -jar $JETTY_HOME/start.jar
  - Load: http://localhost:8080/
- Load the web app at:
  - http://localhost:8080/PersonServlet/people/Kevin

Copyright Brainwash Inc. 2022-2023

API Design: Java Server and Client




- Create HTML client and place in webapps/root directory
- Load with:
  - http://localhost:8080/ApiClient.html

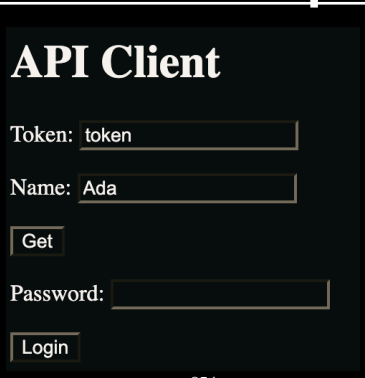

Copyright Brainwash Inc. 2022-2023

- **DataStore is initialized with each start with preconfigured data:**



```
personMap.put("Ada", new Person("Ada", "Ada Lovelace was the first programmer.", 1815, "pwa"));
personMap.put("Kevin", new Person("Kevin", "Kevin is the author of HappyCoding.io.", 1986, "pwk"));
personMap.put("Stanley", new Person("Stanley", "Stanley is Kevin's cat.", 2007, "pws"));    }
```

- **Users can be fetched with GET without login**
- **Logged in users can Save changes to own account**
- **Logged in users can create new users**

Copyright Brainwash Inc. 2022-2023


C# .NET Server



API Design: C#.NET Server and Client



- **C# .NET tutorial**
- **https://learn.microsoft.com/en-us/aspnet/core/tutorials/first-web-api?view=aspnetcore-7.0&tabs=visual-studio-code**

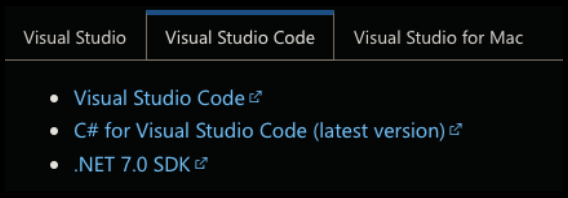

Copyright Brainwash Inc. 2022-2023

Java Standalone Server Using Spark





Java Standalone Server



- Java JDK
- https://docs.oracle.com/en/java/javase/
  - Verify JAVA_HOME is set in env

- Maven
- https://maven.apache.org/download.cgi
- https://maven.apache.org/install.html
  - Verify maven bin dir is in PATH in env

Copyright Brainwash Inc. 2022-2023

Java Standalone Server



- Create Java Maven Project
  - Create pom.xml
    - mvn archetype:generate -DgroupId=com.brainwashinc.demos.hellorestjava -DartifactId=hello-rest -DarchetypeArtifactId=maven-archetype-quickstart -DarchetypeVersion=1.4 -DinteractiveMode=false
  - Build Package
    - cd hello-rest; mvn clean package
  - Run
    - java -cp target/hello-rest-1.0-SNAPSHOT.jar com.brainwashinc.app.App

```
Bear-MBP:hello-rest bearc2020$ java -cp target/hello-rest-1.0-SNAPSHOT.jar com.brainwashinc.app.App
Hello World!
```

Copyright Brainwash Inc. 2022-2023

Java Standalone Server



- Spark
  - "A micro framework for create web applications"
  - Add to project: http://sparkjava.com/download
  - Add to pom.xml

```
<dependency>
    <groupId>com.sparkjava</groupId>
    <artifactId>spark-core</artifactId>
    <version>2.9.4</version>
</dependency>
```

Copyright Brainwash Inc. 2022-2023

Java Standalone Server



- Spark
  - Update App class
    - Imports

```
import static spark.Spark.*;
import spark.Request;
import spark.Response;
import spark.Route;
```

    - Route

```
public class App
{
    public static void main( String[] args )
    {
        get("/hello", (req, res) -> "Hello World");
        // System.out.println( "Hello World!" );
    }
}
```

  - Build: mvn clean package (error: next slide)

Copyright Brainwash Inc. 2022-2023



- Spark
  - Error

```
[ERROR] Failed to execute goal org.apache.maven.plugins:maven-compiler-plugin:3.8.0:compile (default-c
ompile) on project hello-rest: Compilation failure
[ERROR] /Users/Shared/Downloads/pomgen/hello-rest/src/main/java/com/brainwashinc/app/App.java:[16,34]
lambda expressions are not supported in -source 7
[ERROR]   (use -source 8 or higher to enable lambda expressions)
```

- Update pom.xml maven to 1.8

```
  <properties>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
  </properties>
```

Copyright Brainwash Inc. 2022-2023



- Spark
  - Run: e.g.,
  - mvn exec:java -Dexec.mainClass="com.brainwashinc.app.App"

```
SLF4J: Failed to load class "org.slf4j.impl.StaticLoggerBinder".
SLF4J: Defaulting to no-operation (NOP) logger implementation
SLF4J: See http://www.slf4j.org/codes.html#StaticLoggerBinder for further details.
```

- Update pom.xml:

```
    <dependency>
        <groupId>org.slf4j</groupId>
        <artifactId>slf4j-simple</artifactId>
        <version>1.7.21</version>
    </dependency>
```

- Rebuild, Rerun

Copyright Brainwash Inc. 2022-2023

Java Standalone Server



- **Output with port: 4567**

```
[Thread-1] INFO org.eclipse.jetty.util.log - Logging initialized @1265ms to org.eclipse.jetty.util.log.Slf4jLog
[Thread-1] INFO spark.embeddedserver.jetty.EmbeddedJettyServer - == Spark has ignited
[Thread-1] INFO spark.embeddedserver.jetty.EmbeddedJettyServer - >> Listening on 0.0.0.0:4567
[Thread-1] INFO org.eclipse.jetty.server.Server - jetty-9.4.31.v20200723; built: 2020-07-23T17:57:36.812Z; git: 450ba27947e13e66baa8c
d1ce7e85a4461cacc1d; jvm 17+35-LTS-2724
[Thread-1] INFO org.eclipse.jetty.server.session - DefaultSessionIdManager workerName=node0
[Thread-1] INFO org.eclipse.jetty.server.session - No SessionScavenger set, using defaults
[Thread-1] INFO org.eclipse.jetty.server.session - node0 Scavenging every 600000ms
[Thread-1] INFO org.eclipse.jetty.server.AbstractConnector - Started ServerConnector@6becc6b5{HTTP/1.1, (http/1.1)}{0.0.0.0:4567}
[Thread-1] INFO org.eclipse.jetty.server.Server - Started @1354ms
```

- **Hit with browser or curl:**
  - **curl http://localhost:4567/hello**

Hello World

Copyright Brainwash Inc. 2022-2023

Java Standalone Server



- **Change the main**
  - **Add a path for /user**
    - **Takes an id and returns the parameters**

```
path("/user", () -> {
    get("/:id", (req, res) -> req.params());
});
```

- **Rebuild; rerun**
- **Hit with browser or curl:**
  - **curl http://localhost:4567/user/123**

{:id=123}

Copyright Brainwash Inc. 2022-2023



- Change the main
  - Prefix that path with a v1 path

```
path("/v1", () -> {
    path("/user", () -> {
        get("/:id", (req, res) -> req.params());
    });
});
```

  - Rebuild; rerun
  - Hit http://localhost:4567/v1/user/123

```
{:id=123}
```

Copyright Brainwash Inc. 2022-2023



- Add a before and after

```
path("/v1", () -> {
    before("/*", (q, a) -> System.out.print("Received api call\n"));
    path("/user", () -> {
        get("/:id", (req, res) -> req.params());
    });
    after("/*", (q, a) -> System.out.print("Received api done\n"));
});
```

  - Rebuild; rerun
  - Hit http://localhost:4567/v1/user/123
  - See log output

```
Received api call
Received api done
```

Copyright Brainwash Inc. 2022-2023

- Add other methods



```
path("/v1", () -> {
    before("/*", (q, a) -> System.out.print("Received api call\n"))
    path("/user", () -> {
        post("", (req, res) -> "add user");
        put("/:id", (req, res) -> "replace user: " + req.params());
        delete("/:id", (req, res) -> "delete user: " + req.params()
        get("/:id", (req, res) -> req.params());
    });
    after("/*", (q, a) -> System.out.print("Received api done\n"));
});
```

- Rebuild; rerun

Copyright Brainwash Inc. 2022-2023

- Of course you need actually functionality for the methods…



```
path("/v1", () -> {
    before("/*", (q, a) -> System.out.print("Received api call\n"));
    path("/user", () -> {
        post("", (req, res) -> {
            // functionality goes here
            return "add user";
        });
        put("/:id", (req, res) -> "replace user: " + req.params());
        delete("/:id", (req, res) -> "delete user: " + req.params());
        get("/:id", (req, res) -> req.params());
    });
    after("/*", (q, a) -> System.out.print("Received api done\n"));
});
```

Copyright Brainwash Inc. 2022-2023



- Query those methods
  - curl -X POST http://localhost:4567/v1/user
  - curl -X PUT http://localhost:4567/v1/user/1
  - curl -X GET http://localhost:4567/v1/user/1
  - curl -X DELETE http://localhost:4567/v1/user/1

- Spark documentation:
  - http://sparkjava.com/documentation

Copyright Brainwash Inc. 2022-2023

Python Standalone Server Using Flask





Python-Flask Standalone Server



- Install python
  - https://www.python.org/downloads/
- Make a project directory (e.g., pyflaskrestful)
- Create and active an environment
  - python3 -m venv .venvrest
  - source .venvrest/bin/activate
- Install flash and flask-restful
  - pip3 install flask
  - pip3 install flask-restful

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- Create an app.py file
  - Add imports
  - Create API object

```
# using flask_restful
from flask import Flask, jsonify, request
from flask_restful import Resource, Api

app = Flask(__name__)
# API object
api = Api(app)
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- **Create a Resource and add it to the API**
- **Add the run statement**

```
# class for a resource
class UserRoot(Resource):
    def get(self):
        return [{'userId': '123'}, {'userId': '1234'}]

# add the resource(s)
api.add_resource(UserRoot, '/user')

# driver
if __name__ == '__main__':
    app.run(debug = True)
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- **Start the process: python3 app.py**
  - **Uses 127.0.0.1:5000**

```
(.venvrest) Bear-MBP:pyflaskrestful bearc2020$ python app.py
 * Serving Flask app 'app' (lazy loading)
 * Environment: production
   WARNING: This is a development server. Do not use it in a production deployment.
   Use a production WSGI server instead.
 * Debug mode: on
 * Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
 * Restarting with stat
 * Debugger is active!
 * Debugger PIN: 255-296-312
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- **Hit the endpoint**
  - **curl http://127.0.0.1:5000/user**

```
Bear-MBP:javaserverSpark bearc2020$ curl http://127.0.0.1:5000/user
[
    {
        "userId": "123"
    },
    {
        "userId": "1234"
    }
]
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- **Create a User level resource**
  - **Takes userId from path**
- **Add it below the existing UserRoot**

```
class User(Resource):
    def get(self, userId):
        return {'userId': userId}

# add the resource(s)
api.add_resource(UserRoot, '/user')
api.add_resource(User, '/user/<userId>')
```

Copyright Brainwash Inc. 2022-2023



- **Hit the new endpoint**
  - **curl http://127.0.0.1:5000/user/123a**

```
Bear-MBP:javaserverSpark bearc2020$ curl http://127.0.0.1:5000/user/123a
{
    "userId": "123a"
}
```

Copyright Brainwash Inc. 2022-2023



- **Create post method to UserRoot**
  - **Get the form data from the request**

```
class UserRoot(Resource):
    def post(self):
        data = request.form['username']
        return {'username':data, 'userId':'123'}, 201
```

  - **Hit the endpoint with data**

```
curl -X POST http://127.0.0.1:5000/user -d "username=bear"
```

```
Bear-MBP:javaserverSpark bearc2020$ curl -X POST http://127.0.0.1:5000/user
-d "username=bear"
{
    "username": "bear",
    "userId": "123"
}
```

Copyright Br

Python-Flask Standalone Server



- **Change the post endpoint to expect a JSON body**
  - **Return data including body data**

```
    def post(self):
        data = request.json
        return {"username":data["username"], "userId":"123"}
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server



- **Hit the endpoint with JSON data and content-type header**
- **curl -X POST http://127.0.0.1:5000/user -d '{"username":"bear","email":"test@wx.com"}' -H "Content-Type: application/json"**

```
Bear-MBP:javaserverSpark bearc2020$ curl -X POST http://127.0.0.1:5000/user -d
'{"username":"bear","email":"test@wx.com"}' -H "Content-Type: application/json"
{
    "username": "bear",
    "userId": "123"
}
```

Copyright Brainwash Inc. 2022-2023

Python-Flask Standalone Server

Final Full Code

```
# using flask_restful
from flask import Flask, jsonify, request
from flask_restful import Resource, Api

app = Flask(__name__)
# API object
api = Api(app)

# class for a resource
class UserRoot(Resource):
    def post(self):
        data = request.json
#         return data
        return {"username":data["username"], "userId":"123"}
#         data = request.form['username']
#         return {'username':data, 'userId':'123'}, 201

    def get(self):
        return [{'userId': '123'}, {'userId': '1234'}]

class User(Resource):
    def get(self, userId):
        return {'userId': userId}

# add the resource(s)
api.add_resource(UserRoot, '/user')
api.add_resource(User, '/user/<userId>')

# driver
if __name__ == '__main__':
    app.run(debug = True)
```

Copyright Brainwash Inc. 2022-2023

RESTful API Design and Development


The End



Copyright B

Thank you!

Continue Learning on Pluralsight
https://app.pluralsight.com/channels/details/fcdbda2a-fd3a-4a44-ad09-c057fea85ce0?s=1

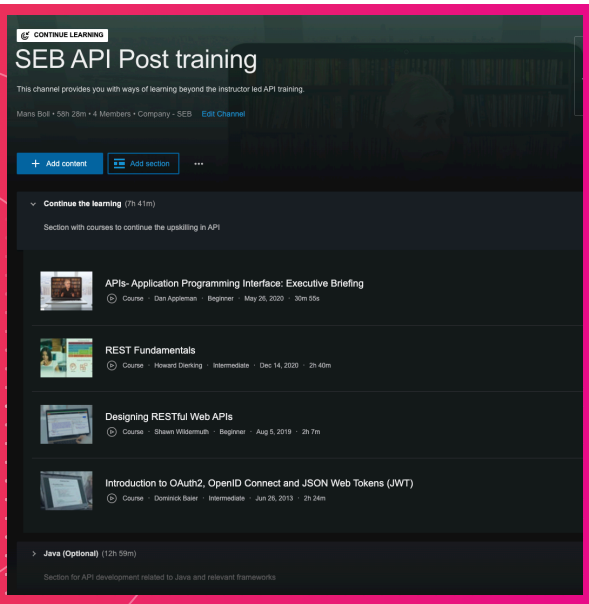

DevelopIntelligence
A PLURALSIGHT COMPANY

Thank you!

If you have additional questions, please reach out to me at:
bear@brainwashinc.com

DevelopIntelligence
A PLURALSIGHT COMPANY